

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

THIS PAGE BLANK (USPTO)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 March 2001 (01.03.2001)

PCT

(10) International Publication Number
WO 01/15487 A1

(51) International Patent Classification⁷: **H04Q 11/04,**
H04L 29/06

(21) International Application Number: **PCT/US00/22855**

(22) International Filing Date: **21 August 2000 (21.08.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
60/150,271 23 August 1999 (23.08.1999) US
09/618,334 18 July 2000 (18.07.2000) US

(71) Applicant (for all designated States except US): **NORTEL
NETWORKS LIMITED [CA/CA]**; World Trade Center
of Montreal, 8th Floor, 380 St. Antoine Street West, Mon-
treal, Quebec H2Y 3Y4 (CA).

(71) Applicants and

(72) Inventors: **SCOGGINS, Shwu-Yan, Chang [US/US];**
209 Youngford Court, Cary, NC 27513 (US). **BROWN,**
Charles, Michael [US/US]; 1104 Hemingway Drive,

Raleigh, NC 27609 (US). **JARZEMSKY, David, John**
[US/US]; 1317 Kintyne Circle, Raleigh, NC 27612 (US).
JOYNER, Stanley, Wayne [US/US]; 2021 North Milpitas
Boulevard, Milpitas, CA 95035 (US). **SCHELLEN-
BERGER, Kathleen, Kelley [US/US];** 102 Dumnonia
Court, Cary, NC 27513 (US).


(74) Agents: **PHILLIPS, Steven, B. et al.; Moore & Van Allen,**
PLLC, P.O. Box 3843, Durham, NC 27702-3843 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **METHOD AND APPARATUS FOR ASSOCIATING AN END-TO-END CALL IDENTIFIER WITH A CONNEC-
TION IN A MULTIMEDIA PACKET NETWORK**

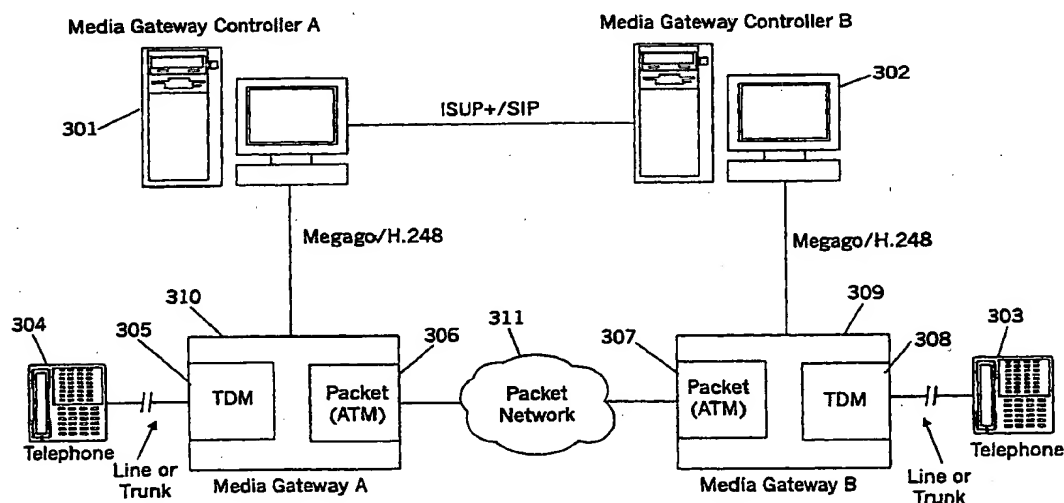

(57) Abstract: An end-to-end call identifier (EECID) is provided to uniquely identify a call leg across a packet network, regardless of the number of nodes used in completing the network path. The EECID allows for call association with a bearer connection so that high level call processing and low level bearer connection management can function independently but correlated by media gateways (309, 310, 414, 415) and media gateway controllers (301, 302, 401, 402). Either a media gateway or media gateway controller can generate (502, 603) the EECID before establishing (504, 505, 604) a connection for a call. The EECID is then sent (503, 603, 604) to remote media gateways and media gateway controllers. The bearer connection can be setup by a media gateway at either end of the connection with respect to where the EECID is generated. The invention is useful in a connection oriented packet network that is connected to a TDM telephone network through a media gateway controlled by a media gateway controller.

WO 01/15487 A1

WO 01/15487 A1



Published:

— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

5

**METHOD AND APPARATUS FOR ASSOCIATING AN END-TO-END
CALL IDENTIFIER WITH A CONNECTION IN A MULTIMEDIA PACKET
NETWORK**

10

DESCRIPTION

Technical Field

This invention is related to multimedia packet networks. Specifically, this invention relates to a mechanism to allow such a packet network to more effectively carry telephony messages, and to more efficiently interface with the public switched telephone network (PSTN).

Background Art

Evolution of the PSTN has accelerated in recent years; however, most of the PSTN still operates on circuit switched, time division multiplexed (TDM) connections. Integrated services digital network (ISDN) bearer channels often provide transport. In parallel with the PSTN, a packet based data network has evolved. This data network has largely been used for Internet traffic and data networking. Although these networks have been mostly separate until recently, the two networks are starting to merge. The merger of these networks requires that voice traffic be carried over packet networks, and further that such packet networks be able to seamlessly

5 integrate with traditional circuit switched networks, as the two types of networks may carry different call legs of the same call.

FIG. 1 illustrates a typical TDM, PSTN call. Caller 101 places a call to callee 105. The call goes through end office A, 102, over some type of trunk bearer channel to toll office 103, then to end office B, 105, and finally
10 to the callee. Such calls may pass through multiple toll offices, or may be connected directly from one end office to another. In any case, a path of circuits for the call is maintained throughout the call. Signaling between offices is typically provided by an ISUP (ISDN user part) connection. ISUP signaling is well understood and is standard in the telecommunications
15 industry. For more information on ISUP signaling, see the various International Telecommunications Union (ITU) Recommendations pertaining to telephone signaling, including Q.761, Q.764 and Q.931, the most recent versions of which at the time of filing this application are incorporated herein by reference.

20 FIG. 2 illustrates a call which is similar to the TDM call of FIG. 1; however, in this case, the call is transported from one end office to another (called switch offices, 202 and 204, in this case) via a packet switched network 203. This fact is, in theory, transparent to caller 201 and callee 205. ISUP+ or SIP+ provides signaling in this case. ISUP+ is essentially the
25 same as ISUP except that ISUP+ signals contain extra fields for packet or cell based network information. An International Telecommunications Union

5 (ITU) recommendation has been proposed for ISUP+ as of the filing date of this application as ITU Q.BICC. SIP stands for "session initiation protocol" and is a well-known standard. SIP and SIP+ are described in document RFC 2543, published by the Internet Engineering Task Force (IETF), March, 1999 which is incorporated herein by reference. SIP and SIP+ provide the
10 same type of signaling for control of calls, but are more oriented towards packet based networks.

The network of FIG. 2 has been conceptualized for some time, and standards groups and conference groups have written extensively about how to make such a network work in everyday use. In order for the call leg
15 which is handled by the packet network to seamlessly connect with the call legs handled by TDM switching offices, media provided by one type of network must be converted into media provided by the other. This conversion is referred to as circuit emulation services (CES) in an ATM network. The device that provides this conversion is called a media gateway (MG). In
20 the network of FIG. 2, a media gateway handles each end of the bearer connection through packet network 203. The media gateway terminates bearer media streams from both the switched circuit TDM network, and the packet network. The media gateway and the network it serves may be capable of processing audio and video (hence the term "multimedia packet
25 network"). The media gateway is capable of full duplex media translations. It may also provide other features such as conferencing.

5 Each media gateway is associated with a media gateway controller (MGC). The media gateway is "dumb" in that it does not have call processing capabilities. The call processing capabilities for the network reside in the MGC. An MGC provides the signaling for call control and controls the call state of a media gateway. The protocol used by the MGC to control the MG
10 is called the media gateway control protocol (or the "Megaco" protocol). Megaco is an application layer protocol which is also described in ITU Recommendation H.248, which shares a common text with the IETF Internet Draft "Megaco Protocol," and which is incorporated herein by reference. The "Megaco Protocol" Internet Draft first became an IETF working docu-
15 ment in March, 1999. Within the Megaco protocol, session description protocol (SDP) can be used to describe bearer channel terminations, which are being controlled by the MGC's. SDP is described in document RFC 2327, published by the IETF, April 1998, which is incorporated herein by reference. Throughout the rest of this disclosure we will refer to Megaco as
20 "Megaco/H.248."

 Despite the fact that the theoretical workings of a network like that shown in FIG. 2 have been widely explored, such networks have seen relatively little everyday use. The reason is that there are still problems to be overcome before such networks exhibit the same very high quality of
25 service for voice traffic that users of the PSTN have come to expect. One such problem stems from the fact that there is no dedicated physical path for

- 5 a call through a packet network, and therefore no way to identify a particular media stream to be associated with a particular call.

A packet switched network, used for transport of audio and video media streams, is typically based on asynchronous transfer mode (ATM), frame relay (FR), and Internet protocol (IP) technologies. Public ATM
10 networks generally operate according to the user network interface (UNI). The UNI is described in the book, "ATM User Network Interface (UNI) Specification Version 3.1" by the ATM Forum, published by Prentice Hall PTR, June, 1995, which is incorporated herein by reference. An update to the UNI version 3.1, "ATM User-Network Interface (UNI) Signaling Specifi-
15 cation 4.0" was published by the ATM Forum in July, 1996, and is incorporated herein by reference. For private ATM networks, the private network to network interface (PNNI) describes the ATM interface. PNNI is covered in the ATM forum document "PNNI addendum for the network call correlation identifier" published by the ATM forum in July 1999, which is incorporated
20 herein by reference. In ATM, fixed length cells carry packetized data. Each cell that is sent through the network has a virtual channel identifier, and other addressing information; however, each node in the network handles many cells that are associated with different media streams. Therefore, each call leg on the ATM network may actually go through many different
25 network nodes and many different virtual circuits to complete the network path. It is impossible for an MGC and a media gateway to correlate the call

5 leg throughout its path with a particular call. Since the nodes in the network are unaware of which call's cells are being sent when, it is difficult to maintain control of the call throughout the network in real time to maintain an appropriate level of quality of service. What is needed is a way within the Megaco/H.248 protocol to absolutely identify a media stream in the network
10 as being associated with a particular call.

Disclosure of Invention

The present invention solves the above-described problem by providing an end-to-end call identifier (EECID) for use in an ATM or other type
15 of packet switched network which serves as a transport network for real-time audio and video media streams. The EECID is used to identify a call leg uniquely across the packet network, regardless of the number of nodes used in completing the network path. The EECID allows a call to be identified uniquely within the packet network, so that the media gateway can process
20 the call accordingly.

Either a media gateway or a media gateway controller, at either the originating or terminating end of the call or the packet network can generate the EECID. In describing the invention, we use "originating" and "terminating" to refer to the calling and called ends of the call path, respectively. We
25 use the terms "near-end" and "far-end" to refer to the end of the path relative to where the particular process being discussed is taking place, usually

5 relative to where the EECID is being created and/or assigned. The terms "near-end" and "far-end" are used independently of the terms "originating" and "terminating." In connection with call setup, the terms "forward" and "backward" refer to which end initiates the bearer connection through the packet network. "Forward" refers to a process where the originating end
10 sets up the connection, and "backward" refers to a process where the terminating end sets up the connection.

In one embodiment of the invention, a media gateway creates the EECID, determining its value after receiving a command from its media gateway controller (MGC) that a connection for the call is to be established.
15 The value can be a unique, randomly created number, or the media gateway can use another number that is associated with some part of the call path, such as a call identifier (call-ID), backwards network connection identifier (BNC-ID), or a network call correlation identifier (NCCI). The media gateway sends the EECID to the associated media gateway controller so that it can
20 be forwarded to the far-end media gateway controller and the far-end media gateway. The media gateway then establishes a corresponding bearer connection so that the EECID is associated with the bearer connection and the call, and notifies its MGC that the call has been established. Once the EECID has been created, the steps can be performed in any order.

25 In another embodiment of the invention, a media gateway controller (MGC) creates the EECID, determining its value after receiving a notification

5 to establish a connection and negotiating connection parameters with a far-end MGC. The notification can either be an offhook notification or a request from the far-end MGC to negotiate connection parameters, depending on whether the near-end MGC is the originating MGC or the terminating MGC. Again, the EECID can be a unique, randomly generated number. The

10 EECID can also be a number associated with some other part of the call path, such as a session identifier (session-ID) or a BNC-ID. Once the EECID has been created and assigned, the near-end MGC sends the EECID to its associated media gateway, and sends the EECID to the far-end MGC so that the EECID is associated with the call and the bearer

15 connection which will be established through the network. Once the EECID has been created, the steps can be performed in any order. Regardless of whether the MG or MGC determines the EECID, once both the near-end and far-end media gateways have the EECID and know which call it is associated with, the EECID can be included in packets which are part of the

20 media stream. For example, if the packet network is an ATM network, the EECID is included in ATM cells that make up the media stream to uniquely identify the call.

The invention is implemented by software in combination with the hardware of the media gateway and media gateway controller. The software

25 which implements many aspects of the present invention can be stored on a media. The media can be magnetic such as diskette, tape or fixed disk, or

5 optical such as a CD-ROM. Additionally, the software can be supplied via a network. A media gateway is essentially a switching system containing switching fabrics, a computing module, network interfaces, and other re-
sources. The network interfaces are implemented by adapters which are
connected to switching fabrics to allow access to the system from the net-
10 works. Input/output modules or adapters allow software to be loaded and various maintenance functions to be performed. A computing module contains a processor and memory that execute the software and provide the means to control the operation of the media gateway to implement the invention.

15 The media gateway controller can also be a switching system, but would more typically be a type of workstation containing a bus such a personal computer interconnect (PCI) bus. A workstation that typically implements the invention includes a plurality of input/output devices and adapters for connection to the necessary networks. A system unit includes
20 both hardware (a central processing unit and memory) and software which together provide the means to implement the media gateway controller.

The invention operates in a network in which media gateways act as endpoints to call legs being carried on a bearer channel between networks. Each media gateway is controlled by and connected to a media gateway
25 controller. An MGC uses the previously mentioned Megaco/H.248 protocol to control its media gateway, and the invention provides an extension to the

5 Megaco/H.248 protocol to move the EECID between media gateways and media gateway controllers. It should be noted that the invention can be used in a network in which only one MGC controls multiple media gateways, or in a network in which one media gateway manages both ends of a connection. In the latter case it is still important to be able to identify the call
10 within the media gateway.

Brief Description of Drawings

FIG. 1 conceptually illustrates a prior-art telephone connection through the public switched telephone network.

15 FIG. 2 conceptually illustrates a telephone connection similar to that of FIG. 1, except that one call leg goes through a packet switched network.

FIG. 3 is a block diagram of one network in which the present invention is used.

FIG. 4 is a block diagram of a different network in which the present
20 invention is used.

FIG. 5 is a flowchart illustrating the method according to one embodiment of the present invention.

FIG. 6 is a flowchart illustrating the method according to another embodiment of the present invention.

25 FIG. 7 illustrates the possible locations in an ATM header for the EECID of the present invention.

5 FIG. 8 illustrates the preferred location in an ISUP+ message for the EECID of the present invention.

 FIG. 9 is an example message flow diagram that illustrates the embodiment of the present invention where a media gateway creates the EECID.

10 FIG. 10 is an example message flow diagram that illustrates the embodiment of the present invention where an MGC creates the EECID.

 FIG. 11 is another example message flow diagram that illustrates the embodiment of the present invention where a media gateway creates the EECID.

15 FIG. 12 is another example message flow diagram that illustrates the embodiment of the present invention where an MGC creates the EECID.

 FIG. 13 is a block diagram of a media gateway that implements the present invention.

 FIG. 14 is drawing of one implementation of a media gateway controller that implements the present invention.

 FIG. 15 shows an example of a media which stores software that implements the present invention.

 FIG. 16 is an additional message flow diagram that illustrates the invention.

25 FIG. 17 is also an additional message flow diagram that illustrates the invention.

5

Mode(s) for Carrying Out the Invention

FIG. 3 illustrates one architecture in which the present invention can be used. According to FIG. 3, telephone 304 is where a call originates. Telephone 303 is where a call terminates. Telephones 303 and 304 are shown as illustrations only. In reality, they can be directly connected to the media gateways or can be connected through extensive TDM networks. In the latter case, lines going into the media gateways would actually be TDM trunks. Media gateway A, 310, is the originating media gateway and media gateway B, 309 is the terminating media gateway. The media gateways of FIG. 3 convert voice to ATM. We therefore refer to this network architecture as voice and telephony over ATM, or "VTOA" architecture. Media gateway controller A, 301, controls media gateway A. Media gateway controller B, 302, controls media gateway B. Alternatively both media gateways can be controlled by a single MGC. Media gateway A includes TDM endpoint 305 and packet endpoint 306. Media gateway B includes TDM endpoint 308 and packet endpoint 307. Packet network 311 serves as the transport network through which bearer channels are established to interconnect calls between the two media gateways. This network and the endpoints to which it is connected can be frame relay, ATM, IP, or some other type of packet network. For illustrative purposes, most of the discussion refers to an ATM network. The media gateway controllers communicate with each other via

5 ISUP+, SIP, or SIP+. It is also possible to use a nonstandard protocol, specific to the manufacturer of the media gateway controllers and media gateways.

Either a media gateway or a media gateway controller can generate the end-to-end call identifier (EECID), as determined by the network designer. The EECID is used to identify a call leg uniquely across the ATM network, regardless of the number of nodes used in completing the network path. The EECID allows the MGC's, the media gateways, and any nodes in the bearer path to identify the call uniquely. Note that media gateway controller A, 301, controls media gateway A, 310, using the Megaco/H.248 protocol, an application layer protocol for media gateway control. Likewise, media gateway controller B, 302, controls media gateway B, 309, using the same Megaco/H.248 protocol. The media gateway or media gateway controller at either end can generate the EECID, regardless of which end is the originating end for the call and which end is the terminating end for the call.

FIG. 4 illustrates a slightly different architecture in which the invention is used. According to FIG. 4, media gateway controller A, 401, controls media gateway A, 415, using the Megaco/H.248 protocol and media gateway controller B, 402, controls media gateway B, 414, using the Megaco/H.248 protocol. In FIG. 4, 403 is the originating telephone and 404 is the terminating telephone. ATM network 411 serves as the transport

5 network. Again, any of the media gateway controllers or media gateways can generate an EECID to identify calls being handled by the network. The main difference between the network of FIG. 4 and the network of FIG. 3 is that the network of FIG. 4 supports digital subscriber loop, or DSL. DSL comes in various types such as aDSL, sDSL and hDSL, and so "xDSL" is used to designate DSL in FIG. 4. In this case each media gateway includes a splitter; 405 in the case of media gateway 415 and 410 in the case of media gateway 414. TDM terminations 406 and 408 and ATM endpoints 407 and 409 each reside in their respective media gateways and allow both data and TDM voice to be transported across the ATM network 411. The splitters 405 and 410 split the voice from the data. The data connection from user terminal 412 is completed through splitter 405 to ATM termination 407 in the case of media gateway A. The data connection from user terminal 413 is completed through splitter 410 to ATM termination 409 in the case of media gateway B. Otherwise, the operation of the network in FIG. 4 is essentially the same as the operation of the network of FIG. 3.

Many aspects of the invention are implemented through enhancements to the previously mentioned Megaco/H.248 protocol. The connection model for the protocol describes logical entities, or objects, within the media gateway that can be controlled by the media gateway controller. The model relies on extractions, primarily terminations and contexts. A termination

5 sources and/or sinks one or more media streams. A context is an association between a collection of terminations.

In general, an "add" command is used to add terminations to contexts. A termination may be moved from one context to another with a "move" command. A termination exists in, at most, one context at a time. A
10 non-packet termination can exist outside of a context. Property values can be set for terminations by including appropriate descriptors as parameters to the various commands in the Megaco/H.248 protocol. A termination in a context may have its value changed by the "modify" command. Other commands that are important to the implementation of the invention will be
15 discussed later.

As previously mentioned, according to one aspect of the invention an end-to-end call identifier (EECID) is associated with a call, and with a bearer path through the packet network, which completes a call leg. When we say the EECID is associated with a call or a path, we mean that all of the nodes
20 and devices involved in maintaining a call leg are aware of which call to which specific Directory Numbers (DN's), or other user addresses are associated with each packet of information which flows through the relevant part of the network. Depending on the type of underlying networks and/or protocols the EECID can be carried across the network in various ways.
25 Details of some possible signaling will be discussed later.

5 FIG. 5 and FIG. 6 illustrate the overall method involved in moving the EECID across the network. FIG. 5 is a flow chart, which illustrates the steps performed in the near-end media gateway when a media gateway creates the EECID. At 501 the media gateway is instructed to establish a connection for a call. Usually, this instruction is an add command from an associated media gateway controller. At 502 the media gateway selects an EECID. At 503 the near-end media gateway sends the EECID to its MGC. The near-end MGC then sends the EECID to the far-end MGC for forwarding to the far-end media gateway. At 504 the near-end media gateway receives a setup command containing the EECID from the far end of the connection. At 505, the near-end media gateway accepts the bearer connection so that the EECID is associated with the bearer connection and the call. At 506 both media gateways notify their MGC's that the connection has been established. The media gateways are now maintaining a bearer connection tagged with the EECID.

20 FIG. 6 illustrates the method performed by a near-end media gateway controller for creating the EECID and associating it with a call. At 601 the media gateway controller is notified to establish a connection for a call. This notification comes as an offhook notification sent by the near-end media gateway if the near-end MGC is also the originating MGC. At 602 the MGC's agree on connection parameters, including which end will initiate bearer path setup. At 603 the near-end MGC selects the end-to-end call

5 identifier and forwards it to the far-end MGC. At 604 both MGC's send the
EECID to their associated media gateways, usually as part of an add com-
mand. The media gateways set up a connection. The media gateway
chosen to set up the connection sends a setup command with the EECID to
the other media gateway and the connection is accepted. At 605 both
10 MGC's are notified by their respective media gateways that the bearer
connection has been established.

It is preferable to include the EECID in the Megaco/H.248 protocol as
part of the stream descriptor in addition to the local control descriptor, local
descriptor, and remote descriptor. These descriptors are all part of the
15 stream parameter, a known part of the Megaco/H.248 protocol. It is also
possible to include the EECID in the Megaco/H.248 protocol as part of a
session descriptor protocol (SDP) term. SDP is a well-known protocol,
described in the previously cited IETF RFC 2327, which is used to describe
packet terminations, such as IP and ATM terminations within the
20 Megaco/H.248 protocol.

In addition to including the EECID in the Megaco/H.248 protocol, it
must be included in other protocols and/or data streams that allow the
network to communicate. It is especially important to include the EECID in
the ATM cell structure used in the ATM transport network, since the media
25 gateways on the ends of the ATM networks form the ends of the bearer
channel carrying the part of the call leg which passes through the packet

5 network. Assuming the packet network shown in FIG. 3 and FIG. 4 is an ATM network implemented according to the UNI standard promulgated by the ATM forum, FIG. 7, at 702, 703, 704, and 705, illustrates the possible places in an ATM cell where the EECID can be placed. Network prefix 701 is a fixed, required part of the cell, used for routing. The EECID could be placed in the ATM user part, 702. ATM network routing only uses the first thirteen-byte network prefix of the ATM address. The following 7 bytes of the user part can be used to transport the EECID. Another possible place for the EECID is the ATM subaddressing field, 703. The subaddressing field usually only has local significance and can be dropped if it is unused. It can be adapted to implement the EECID of the present invention. Most non-UNI 4.0 compliant ATM networks are currently implemented without using a generic information transport/information element (GIT IE) field; however, the GIT IE field, 705, will probably be the best place for the EECID as that field becomes more widely used.

20 It should be noted that the ATM UNI standard specifies the ATM interface for public networks. For private networks the private network to network interface (PNNI) describes the ATM interface. PNNI includes a network call correlation identifier/information element (NCCI/IE) 704 as shown in FIG. 7. The NCCI is used to uniquely identify a call in PNNI. Only one connection can exist per call therefore the NCCI can also be used to uniquely identify a connection associated with this call. The NCCI has

25

5 limitations in that it can not be generated by an MGC or media gateway since the identifier is generated by an ATM edge switch for the setup of the actual network path to be used as the bearer path. In addition, the NCCI is a 28-byte field, making it unnecessarily large for the purpose of the EECID. The NCCI is inapplicable to frame relay networks

10 The EECID must also be included in ISUP+ messages, if ISUP+ is used between the two gateway media controllers. FIG. 8 shows an ISUP+ message. Field 801 contains the ISUP information and 802 contains the ISUP+ information, which is essentially directed towards packet based networks, and includes an application transport mechanism field. The
15 EECID is preferably included in the transport mechanism field.

If SIP+ is used between the two media gateway controllers, the EECID is carried as a term in the session description protocol (SDP). Syntax for the session description protocol, which includes the EECID, is "c=eecid: (eecid value)" or "a=eecid: (eecid value)." Note that the terms
20 "c=eecid: (eecid value)" or "a=eecid: (eecid value)" need not be used if the stream descriptor is used to specify the EECID in the Megaco/H.248 protocol.

As previously discussed, either an MGC or a media gateway somewhere in the network selects the EECID, that is, determines a value for the
25 EECID, before it can be associated with a call leg. The EECID can be any arbitrary number that is unique so as to allow correlation of the end-to-end

5 network path between the two media gateways. The choice of the value for the EECID has implications for the call flow. In some cases, the value can only be derived by the network, as with the NCCI as discussed above. Preferably, the value of the EECID is not dependent on the underlying network architecture. A simple way to create an EECID is to simply have
10 the device that is determining the EECID, generate a random number. It is also possible to use a number that is already associated with some part of the network.

A possible value to use for the EECID is a session-ID or call-ID. The session-ID is a random number passed from the MGC to the media gate-
15 way. The media gateway can then pass the session-ID to the far end media gateway as an EECID with its initial setup message. The session-ID can also be passed through ISUP+ messages. The session-ID would not be able to be used if the media gateway is to generate the EECID. The call-ID is similar to the session-ID. Both are specified to identify a call solely within
20 an MGC or media gateway.

Finally, the most preferable value for the EECID, assuming a numerical value, which is associated with the network, is used, is the ATM supported backward network connection identifier (BNC-ID). The BNC-ID is four bytes long and is generated by the media gateway. The media gateway
25 sends the BNC-ID to its media gateway controller for forwarding to the far-

5 end. The BNC-ID is included in the setup command between media gateways to correlate the call.

There are multiple ways to set up and correlate a packet network call path so that an appropriate wait state for establishment of the path is manifested. In one embodiment, a package with a signal, called a "connection
10 available" (coav) signal, that explicitly requests the establishment of the packet network path, an event, called a "connection available" (coav) event, that explicitly reports the successful completion of the path, and an event, called "connection not available" (cont), that explicitly reports the failure to establish the requested path, can be added to any protocol that is used for
15 call control in any packet based network. Similarly, the package would include a signal, called a "connection not available" (cont) signal, that explicitly requests the release of the packet network path, and an event, called a "connection not available" (cont) event, that explicitly reports the successful release of the path. If the invention is used with the Megaco/H.248 protocol,
20 these signals and events can be used alone, or with an existing provisional response mechanism implemented through the "transaction pending" command. The events and signals that are used in both of these alternatives are shown in the following table. The EECID, previously discussed, is an optional parameter for the coav and cont events, hence it is denoted with the
25 letter O. If a media gateway fails to release a packet network path, the media gateway sends a report of failure (of) event to the media gateway

- 5 controller. The continuity check, continuity response, and report failure are also part of this package, which we call the "packet pipe" event package:

	Symbol	Definition	R	S	Parameter(s)
10	coav	bearer connection available	X	BR	EECID (O)
	cont	bearer connection not available	X	BR	EECID (O)
	co1	continuity check	X	TO	
	co2	continuity response	X	TO	Duration
15	of	report failure	X		Duration

R specifies that each symbol is part of an event report. BR indicates a brief tone. TO indicates a timeout tone that stops after the amount of time specified by the duration parameter has passed. Note that the co1 and co2 signal/events are shown for illustrative purposes only to demonstrate the optional use of continuity testing in conjunction with the process of setting up a bearer path. These signals are not required to implement the present invention in Megaco/H.248.

The explicit request alternative has desirable characteristics. In particular, the use of explicit signals and events eliminates the need for the media gateway to maintain the state of an add transaction request. The explicit embodiment also reduces the transaction request state monitoring in the MGC, and eliminates the need for the media gateway to potentially send multiple transaction pending replies. The explicit signals and events also reduce complexity when multiple add commands are used in a single transaction.

5 When requesting establishment of a network path, an add command is sent to the media gateway, which then explicitly specifies the "connection available" (coav) signal and event. When requesting release of a network path, a subtract command is sent to the media gateway, which then explicitly specifies the "connection not available" (cont) signal and event. The
10 coav signal is sent only to the ATM termination, which is responsible for the origination of the setup sequence of the network path. The transaction, which specifies these requests, is acknowledged on receipt. The media gateway manifests the coav signal for an ATM network. A notify message of the coav or the cont event is sent from the media gateway to the MGC upon
15 a connection becoming available or upon failure to establish the connection, respectively.

 Note that the use of the coav and cont signals are optional. If they are not used, the initiation of the establishment or release of the path is implied by the add or subtract command, respectively.

20 The continuity check and response can be used automatically by the media gateway without an instruction from the MGC. However, these two events/signals can also be requested by the MGC during call processing. An additional characteristic of this approach is that embedded signals and events can be used to allow for additional processing to be invoked auto-
25 matically for such things as continuity checking of the network path.

5 An alternative way of making a connection request is based on the Megaco/H.248 provisional response "transaction pending" reply wait state. This command is used when a command is received but pending for completion of processing. The media gateway can respond to the MGC with a command "transaction pending" response, so that the MGC won't be
10 blocked for the completion response. When the media gateway finishes executing the command, it can then send the "transaction reply" message to acknowledge that the original command has been successfully completed or has failed. In addition to using the coav signal explicitly, the connection request is expressed implicitly by the add command. The rationale behind
15 this approach is that the packet connection does not exist until it is added to the context. Therefore, the add command implies setting up the bearer connection.

 The EECID is present in either the stream descriptor or the termination descriptor for the network path. The media gateway must use the
20 EECID to determine if it needs to initiate the network path setup. The media gateway will keep a record of all requests received from other media gateways for setup of a network path. When the add command is received, the media gateway will determine if a bearer path setup request with the specified EECID has been received. If a network path associated with the EECID
25 exists, then the network path bearer connection already exists and the correlation is reported back to the MGC via a transaction reply. If no pend-

5 ing network path is found with the same EECID, then the path initialization is invoked. In this approach, there won't be a coav signal and bearer connection available event notification. If the media gateway determines that there will be sufficient delay setting up the bearer connection to cause the transaction request to time out, the media gateway will respond to the media gateway controller with a transaction pending response. Upon completing
10 the bearer connection, the media gateway will respond to the MGC with a transaction reply indicating success or failure of the attempt.

The method described immediately above can incur processing overhead in determining whether or not network path setup is required. Another
15 negative consideration is that there is no mechanism to use embedded signals and events to allow for automatic processing of subsequent actions such as continuity checking of the network bearer path. The MGC has to issue a separate message for continuity checking and response. This combination at least eliminates the need for the media gateway to search
20 through pending network path requests to determine if a network path setup is required. If the coav signal is present, the setup will begin immediately. If the two embodiments are used simultaneously, accommodations have to be made to eliminate redundant messaging to report the completion of the add command and the coav or cont event.

25 To illustrate the detail of the invention, Figures 9-12 present detailed signal flows showing the successful setup of bearer path connections in a

5 multimedia packet network. There are literally dozens of possible signal flows, which could be implemented to make use of the invention. The signal flows presented here should be considered as examples only. When we refer to implicit versus explicit setup, we are using the terminology discussed above for explicit versus implicit signaling and events. When we refer to
10 forward setup versus backward setup we are referring to which end of the network is performing the bearer path setup relative to the originating end of the network. If the originating end of the network is also setting up the bearer connection we have a forward setup. If the originating end of the network is passing information to the terminating end and the terminating
15 end is setting up the bearer connection, we have a backward setup. In reference to FIG. 9, all messages are discussed. For the other message flow diagrams, only new messages, which are important to illustrating the differences between those examples and previous examples, are discussed. The letters A and B correspond to the ends of the network path as shown in
20 the network diagrams of Figures 3 and 4.

In Figures 9-12, and in Figures 16 and 17, the TDM termination is a logical representation of a TDM line and an ATM termination is a logical representation of an ATM network connection. Although an ATM termination is illustrated in all cases, the invention is not limited to use of an ATM
25 network for the bearer connection. The invention is also applicable with other connection-oriented networks such as frame relay networks.

5 Turning to FIG. 9, an explicit forward setup is illustrated. At 910, a notify message indicating an offhook condition is sent from media gateway A to MGC A. At 911, MGC A responds with an add command. At 916, media gateway A replies with a transaction reply. At 913 and 901, the two media gateway controllers negotiate connection parameters. At 914, MGC A
10 sends a pipe connect request to MGC B. In this case, at 902, MGC B sends an add command to media gateway B with explicit instructions for setting up the bearer path with the connection signal coav and the event coav when the connection is available. At 903, media gateway B immediately responds to MGC B with a transaction reply signal; the transaction reply signal is in
15 response to an add command. This transaction reply does not mean that the add command is completed. Rather, the transaction reply simply means that media gateway B is working on adding the ATM termination. Media gateway B chooses an EECID at 902 and sends the EECID back to MGC B at 903. MGC B passes the EECID to MGC A at 907. At 915, MGC A sends
20 the add command with the EECID and explicit event and signal coav. Media gateway A immediately replies to MGC A with a transaction reply at 917. At 904, the UNI setup message is sent from media gateway A through the ATM network to media gateway B. A connect message is sent from media gateway B to media gateway A to indicate the bearer path is accepted at 905.
25 Media gateway B uses the EECID to associate the call and the bearer path.

- 5 This prevents an unauthorized bearer connection from being set up. Then MGC B notifies media gateway B at 906.

After receiving a UNI connect message from media gateway B, media gateway A notifies MGC A that the coav event has occurred at 908. In the above example, the MGC B cannot add the ATM termination until the UNI
10 service has been set up. This limitation comes about because the EECID is needed to create the ATM termination. At 918, MGC B is notified by MGC A through ISUP+ or other means that the bearer path (packet pipe) connection has been established. The process is completed with the pipe connect complete ack message at 912.

- 15 FIG. 10 illustrates the signal flows for explicit backward setup. At 1001, MGC A chooses the EECID and passes it to media gateway A. There is an embedded continuity check applied after the coav event occurs and there is a return continuity check associated with the continuity check event. At 1012, MGC A passes the EECID to MGC B. At 1002, media gateway A
20 sends a transaction reply to the add command to acknowledge that the transaction is accepted. Once again, the add command has not been fully executed. At 1011, MGC B sends an add command to MG B. This command asks for a bearer path to be set up using signal=coav. At 1003, media gateway B sends the ATM UNI setup message with an EECID to media
25 gateway A. An event notification on coav with embedded event co1 and signal co2 is explicitly requested. Upon receipt of continuity check co1

5 response co2 will be given. This command also asks for a bearer path to be set up using signal=coav. After the connection is set up, media gateway B responds at 1005 with a coav event. At 1009 MG A also notifies MGC A that event=coav has occurred. At 1006, the continuity check signal is applied by media gateway A since the coav has occurred. At 1007, media
10 gateway B applies the continuity check response signal since it receives the continuity check event. At 1008, media gateway B notifies its media gateway controller that the continuity check event has occurred. Similarly, media gateway A notifies its media gateway controller that the coav and the continuity check return events have both occurred at 1010.

15 FIG. 11 illustrates the message flows for implicit backward setup. In this case, the EECID is assigned by the media gateway. At 1101, media gateway A chooses the EECID and sends a transaction pending response with the EECID to its media gateway controller so that the media gateway controller waits for the setup. At 1102, media gateway B passes the EECID
20 in the UNI setup message to media gateway A. At 1103, when the connection setup is complete, media gateway A sends a transaction reply to the add command and the EECID to media gateway controller A. At 1104, media gateway B sends a transaction reply to the add command to MGC B.

FIG. 12 also illustrates an implicit forward setup. In this case a media
25 gateway controller creates the EECID. Also, the co1 and co2 continuity checking messages are used. At 1201, an add command with the EECID is

5 sent from media gateway controller A to media gateway A. At 1202, media gateway A responds to its MGC with a transaction pending command. Note that media gateway A still uses the EECID for establishing the connection with media gateway B. 1203 and 1204 illustrate the continuity check and continuity check response, respectively.

10 Figures 16 and 17 illustrate what happens when a failure occurs. In FIG. 16, at 1601, MG B can't accept the UNI setup due to an error. Any number of things could cause the error. One possibility is that there is no EECID known at MG B that matches the one in the UNI setup message. At 1604, MG B reports failure (of) to MGC B. At 1602 MG A times out or.
15 receives a reject message from MG B. MG A reports failure (of) to MGC A at 1603. At 1605, and 1606, MGC a and MGC B exchange messages to disconnect the pipe connection. Messages like that shown at 1605 and 1606 can come from either MGC A or MGC B.

In FIG. 17, the EECID is created and sent from MG A to MGC A at
20 1701. MG A sends the UNI setup message at 1702, but it is rejected at 1706. After the add command is confirmed at 1705, a report of failure (of) is sent from MG A to MGC A at 1708. A report of failure is also sent from MG B to MGC B at 1707.

FIG. 13 illustrates a conceptual, functional block diagram of a switch-
25 ing system which can be used to implement a media gateway, which in turn implements the invention. Computing module 1301 includes a central

5 processing unit, memory, and supporting circuitry. This computing module, together with any computer program code stored in the memory, is the means for controlling the overall operation of the switching system to perform the method of the invention. TDM switching fabric 1302 is for switching TDM channels and is controlled by the computing module. Input/output (I/O)
10 module 1304 is also connected to the processor of computing module 1301 and includes media devices to load computer program code as well as connections for workstations or other equipment for control and maintenance of the switching system. TDM network access module 1303 serves as a TDM network interface and is connected to TDM switching fabric 1302,
15 both of which are managed by the computing module 1301. Circuit emulation system 1305 provides circuit emulation services, converting TDM voice to packets such as ATM cells. Packet switching fabric 1306 sends and receives packets on the packet network through packet network interface 1307.

20 FIG. 14 illustrates a workstation, which can be used to implement a media gateway controller according to the present invention. I/O devices such as keyboard 1402, mouse 1403 and display 1404 are used to control the system. One or more of these devices may not be present in normal operation. System unit 1401 is connected to all devices and contains
25 memory, media devices, and a central processing unit (CPU) all of which together form the means to implement the present invention. Network

5 interfaces are normally implemented via adapter cards plugged into a bus, however, for the sake of simplicity they are shown graphically as interface 1405.

As previously mentioned, appropriate computer program code in combination with appropriate hardware implements most of the elements of the present invention. This computer program code is often stored on
10 storage media. This media can be a diskette, hard disk, CD-ROM, or tape. The media can also be a memory storage device or collection of memory storage devices such as read-only memory (ROM) or random access memory (RAM). Additionally, the computer code can be transferred to the work-
15 station over the Internet or some other type of network. FIG. 15 illustrates one example of a media. FIG. 15 shows a diskette of the type where magnetic media 1502 is enclosed in a protective jacket 1501. Magnetic field changes over the surface of the magnetic media 1502 are used to encode the computer program code. In this way the computer program code is
20 stored for later retrieval.

We have described specific embodiments of our invention, which provides an end-to-end call identifier (EECID) to uniquely identify a call leg across a packet network, regardless of the number of nodes used in completing the network path. One of ordinary skill in the networking and computing arts will quickly recognize that the invention has other applications in
25 other environments. In fact, many embodiments and implementations are

- 5 possible. The following claims are in no way intended to limit the scope of the invention to the specific embodiments described.

We claim:

CLAIMS

1 1. In a media gateway, a method of identifying a connection for a
2 call, the method comprising the steps of:

3 receiving (501) a command from an associated media gateway
4 controller to establish the connection for the call;

5 determining (502) a value for an end-to-end call identifier
6 (EECID);

7 sending (503) the EECID to the associated media gateway
8 controller;

9 establishing (504, 505) the connection for the call with the far
10 end media gateway so that the EECID is associated with the connec-
11 tion and the call; and

12 notifying (506) the associated media gateway controller that
13 the connection has been established.

1 2. The method of claim 1 wherein the value of the EECID is a ran-
2 domly generated number.

1 3. The method of claim 1 wherein the value of the EECID is the
2 same as that of a network call correlation identifier.

1 4. The method of claim 1 wherein the value of the EECID is the
2 same as that of a backward network connection identifier.

1 5. In a media gateway controller, a method of identifying a connec-
2 tion for a call, the method comprising the steps of:
3 receiving (601) a notification to establish the connection;
4 negotiating (602) connection parameters with a far-end media
5 gateway controller;
6 determining (603) a value for an end-to-end call identifier
7 (EECID);
8 sending (603, 604) the EECID to an associated media gate-
9 way and to the far-end media gateway controller so that the EECID is
10 associated with the connection and the call; and
11 receiving (605) a notification from the associated media gate-
12 way that the connection has been established.

1 6. The method of claim 5 wherein the notification to establish a
2 connection is an offhook notification.

1 7. The method of claim 5 wherein the notification to establish a
2 connection is a request to negotiate parameters, the request being received
3 from the far-end media gateway controller.

1 8. The method according to any of claims 5 through 7 wherein the
2 value of the EECID is a randomly generated number.

1 9. The method according to any of claims 5 through 7 wherein the
2 value of the EECID is the same as that of session-ID.

1 10. The method according to any of claims 5 through 7 wherein the
2 value of the EECID is the same as that of a backward network connection
3 identifier.

1 11. The method according to any of claims 5 through 7 wherein the
2 value of the EECID is the same as that of a call-ID.

1 12. A computer program product (1501, 1502) for enabling a media
2 gateway to identify a connection for a call, the computer program product
3 including a media with a computer program embodied therein, the computer
4 program comprising:

5 computer program code for receiving a command from an as-
6 sociated media gateway controller to establish the connection for the
7 call;

8 computer program code for determining a value for an end-to-
9 end call identifier (EECID);

10 computer program code for sending the EECID to the associ-
11 ated media gateway controller;

12 computer program code for establishing the connection for the
13 call with the far end media gateway so that the EECID is associated
14 with the connection and the call; and

15 computer program code for notifying the associated media
16 gateway controller that the connection has been established.

1 13. The computer program product of claim 12 wherein the value of
2 the EECID is a randomly generated number.

1 14. The computer program product of claim 12 wherein the value of
2 the EECID is the same as that of a network call correlation identifier.

1 15. The computer program product of claim 12 wherein the value of
2 the EECID is the same as that of a backward network connection identifier.

1 16. A computer program product (**1501, 1502**) for enabling a media
2 gateway controller to identify a connection for a call, the computer program
3 product including a media with a computer program embodied thereon, the
4 computer program comprising:
5 computer program code for receiving a notification to establish
6 the connection;
7 computer program code for negotiating connection parameters
8 with a far-end media gateway controller;
9 computer program code for determining a value for an end-to-
10 end call identifier (EECID);

11 computer program code for sending the EECID to an associ-
12 ated media gateway and to the far-end media gateway controller so
13 that the EECID is associated with the connection and the call; and
14 computer program code for receiving a notification from the
15 associated media gateway that the connection has been established.

1 17. The computer program product of claim 16 wherein the notifica-
2 tion to establish a connection is an offhook notification.

1 18. The computer program product of claim 16 wherein the notifica-
2 tion to establish a connection is a request to negotiate parameters, the
3 request being received from the far-end media gateway controller.

1 19. A switching system including a computing module **(1301)** and as-
2 sociated switching fabrics **(1302, 1306)** and network interfaces **(1303, 1307)**,
3 the switching system operable as a media gateway which is programmed to
4 identify a connection for a call by performing the steps of:
5 receiving a command from an associated media gateway con-
6 troller to establish the connection for the call;

7 determining a value for an end-to-end call identifier (EECID);
8 sending the EECID to the associated media gateway control-
9 ler;
10 establishing the connection for the call with the far end media
11 gateway so that the EECID is associated with the connection and the
12 call; and
13 notifying the associated media gateway controller that the
14 connection has been established.

1 20. The switching system of claim 19 wherein the value of the EECID
2 is a randomly generated number.

1 21. The switching system of claim 19 wherein the value of the EECID
2 is the same as that of a network call correlation identifier.

1 22. The switching system of claim 19 wherein the value of the EECID
2 is the same as that of a backward network connection identifier.

1 23. A computer system (1401, 1405) operable as a media gateway
2 controller which is programmed to identify a connection for a call by per-
3 forming the steps of:
4 receiving a notification to establish the connection;
5 negotiating connection parameters with a far-end media gate-
6 way controller;
7 determining a value for an end-to-end call identifier (EECID);
8 sending the EECID to an associated media gateway and to the
9 far-end media gateway controller so that the EECID is associated
10 with the connection and the call; and
11 receiving a notification from the associated media gateway that
12 the connection has been established.

1 24. The computer system of claim 23 wherein the notification to
2 establish a connection is an offhook notification.

1 25. The computer system of claim 23 wherein the notification to
2 establish a connection is a request to negotiate parameters, the request
3 being received from the far-end media gateway controller.

1 28. Apparatus operable to identify a connection for a call in a packet
2 network, the apparatus comprising:

3 means for receiving (1301, 1304) a command from an associ-
4 ated media gateway controller to establish the connection for the call;

5 means for determining (1301, 1304) a value for an end-to-end
6 call identifier (EECID);

7 means for sending (1301, 1304) the EECID to the associated
8 media gateway controller; and

9 means for establishing (1301, 1304, 1306, 1307) the connec-
10 tion for the call with the far end media gateway so that the EECID is
11 associated with the connection and the call.

1 29. Apparatus which associates an end-to-end call identifier with a
2 connection for a call, the apparatus comprising:

3 means for receiving (1401, 1405) a notification to establish the
4 connection;

5 means for negotiating (1401, 1405) connection parameters
6 with a far-end media gateway controller;

7 means for determining (1401) a value for an end-to-end call
8 identifier (EECID); and

9 means for sending (1401, 1405) the EECID to an associated
10 media gateway and to the far-end media gateway controller so that
11 the EECID is associated with the connection and the call.

1 30. In a multimedia packet network, a method of identifying a con-
2 nection for a call comprising the steps of:

3 at a media gateway controller, notifying (902, 911) an associ-
4 ated media gateway to establish the connection for the call;

5 determining a value for an end-to-end call identifier (EECID) at
6 the associated media gateway;

7 sending (903, 1101) the EECID from the associated media
8 gateway to the media gateway controller so that the EECID is associ-
9 ated with the connection and the call at all media gateways and me-
10 dia gateway controllers involved in the call; and

11 establishing (904, 905, 1003, 1102) the connection for the call
12 at the associated media gateway and notifying (906, 908, 1005, 1009,
13 1103, 1104) the media gateway controller that the connection has
14 been established.

1 31. In a multimedia packet network, a method of identifying a con-
2 nection for a call comprising the steps of:
3 receiving (910, 913) a notification at a media gateway control-
4 ler to establish a connection for a call;
5 negotiating (901, 913) connection parameters at the media
6 gateway controller;
7 selecting an end-to-end call identifier (EECID) at the media
8 gateway controller;
9 notifying (1001, 1201) an associated media gateway of the
10 EECID as part of a command issued to the associated media gate-
11 way by the media gateway controller to establish the connection; and
12 establishing (904, 905, 1003, 1006, 1102) the connection for
13 the call at the associated media gateway.

1 32. A multimedia packet network including at least one media gate-
2 way controller (301, 302, 401, 402) connected to an associated media
3 gateway (309, 310, 414, 415), the media gateway controller operable to
4 control the associated media gateway, the media gateway controller and the
5 associated media gateway programmed to enable the identification of a
6 connection for a call by performing the steps of:

7 notifying the associated media gateway to establish the con-
8 nection for the call;
9 determining a value for an end-to-end call identifier (EECID) at
10 the associated media gateway;
11 sending the EECID from the associated media gateway to the
12 media gateway controller so that the EECID is associated with the
13 connection and the call at all media gateways and media gateway
14 controllers involved in the call; and
15 establishing the connection for the call at the associated media
16 gateway and notifying the media gateway controller that the connec-
17 tion has been established.

1 33. A multimedia packet network including at least one media gate-
2 way controller (301, 302, 401, 402) connected to an associated media
3 gateway (309, 310, 414, 415), the media gateway controller operable to
4 control the associated media gateway, the media gateway controller and the
5 associated media gateway programmed to enable the identification of a
6 connection for a call by performing the steps of:

7 receiving a notification at the media gateway controller to es-
8 tablish a connection for a call;

9 negotiating connection parameters at the media gateway con-
10 troller;
11 selecting an end-to-end call identifier (EECID) at the media
12 gateway controller;
13 notifying an associated media gateway of the EECID as part of
14 a command issued to the associated media gateway by the media
15 gateway controller to establish the connection; and
16 establishing the connection for the call at the associated media
17 gateway.

FIG. 1
PRIOR ART

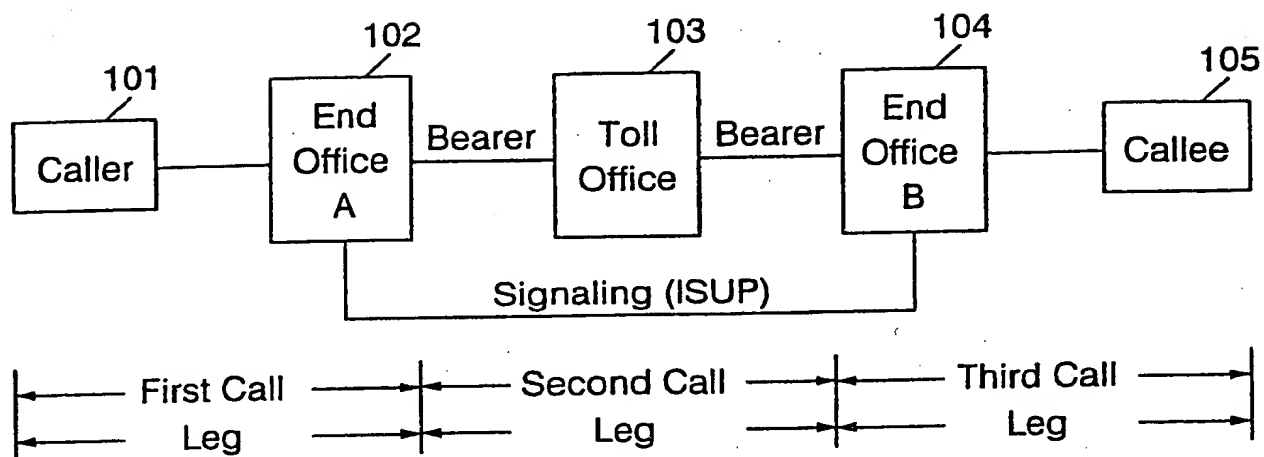


FIG. 2
PRIOR ART


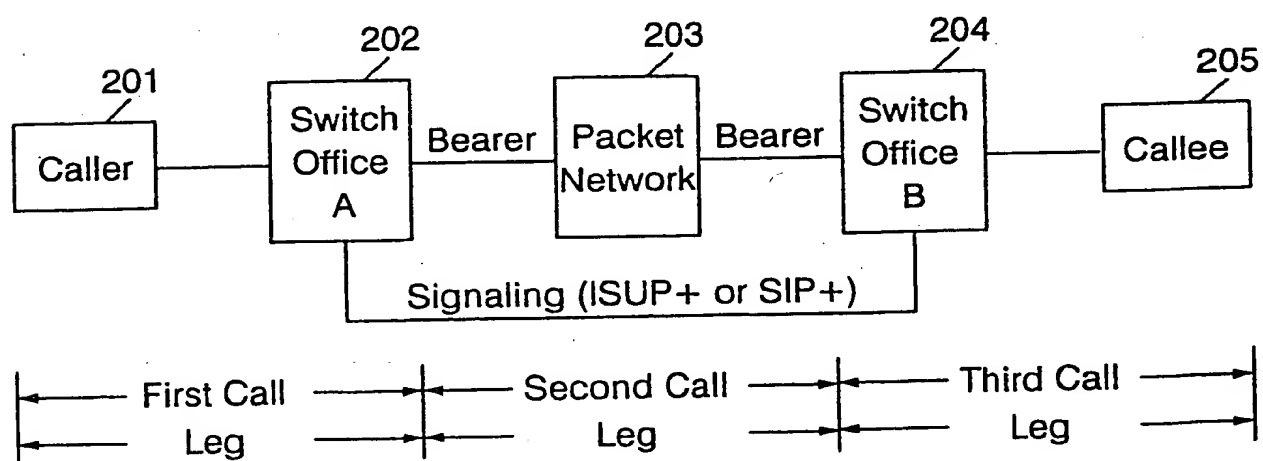


FIG. 3

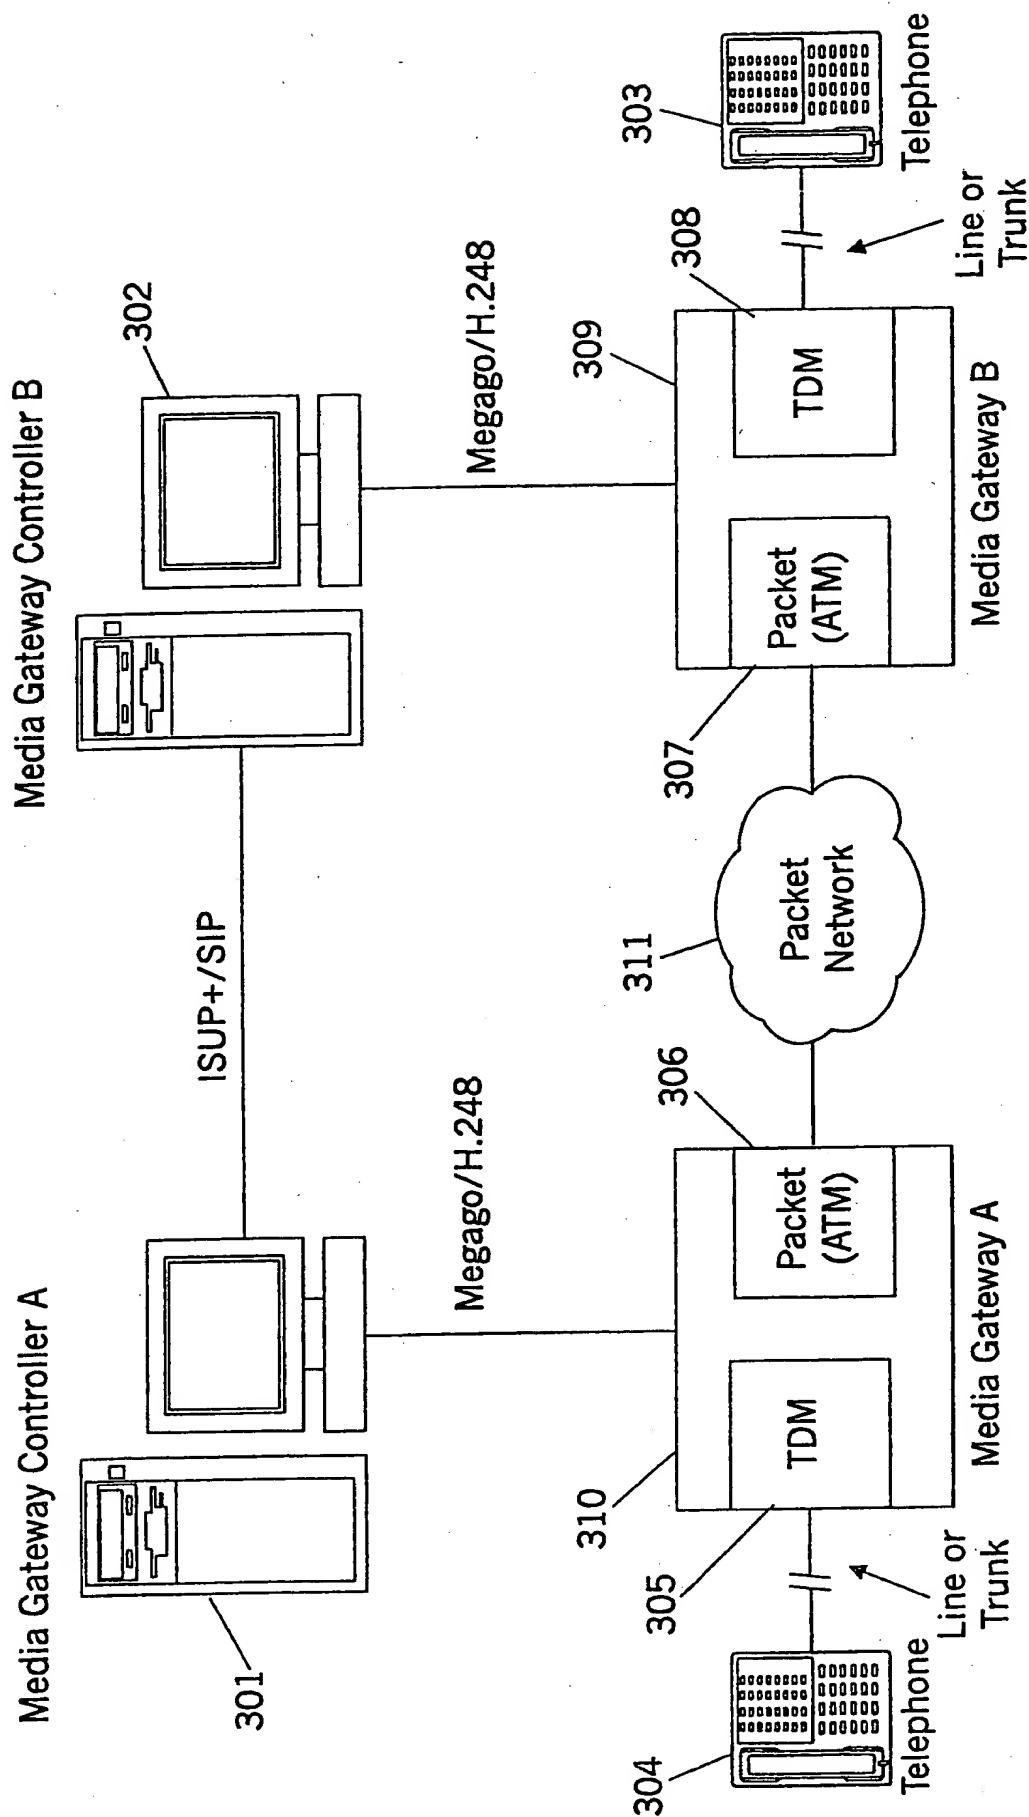

3 / 14

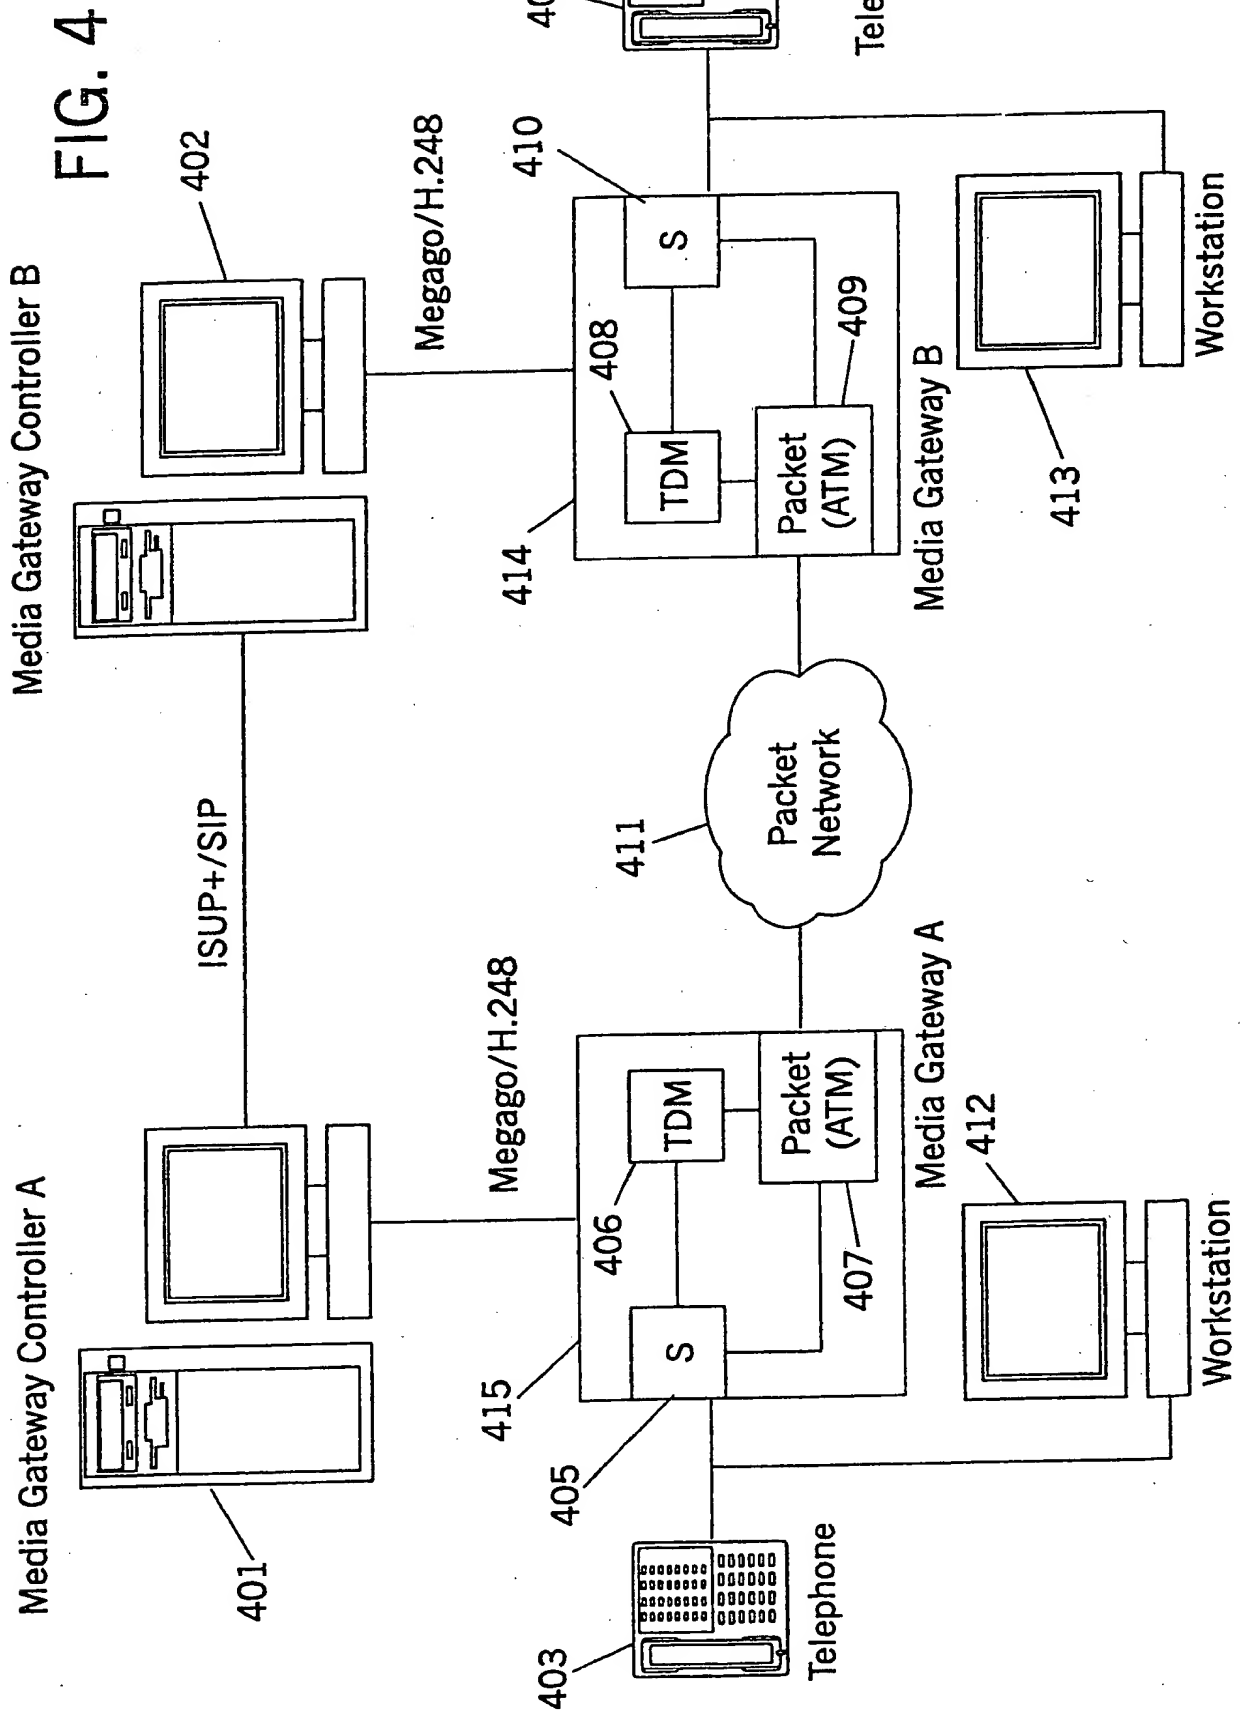


FIG. 5

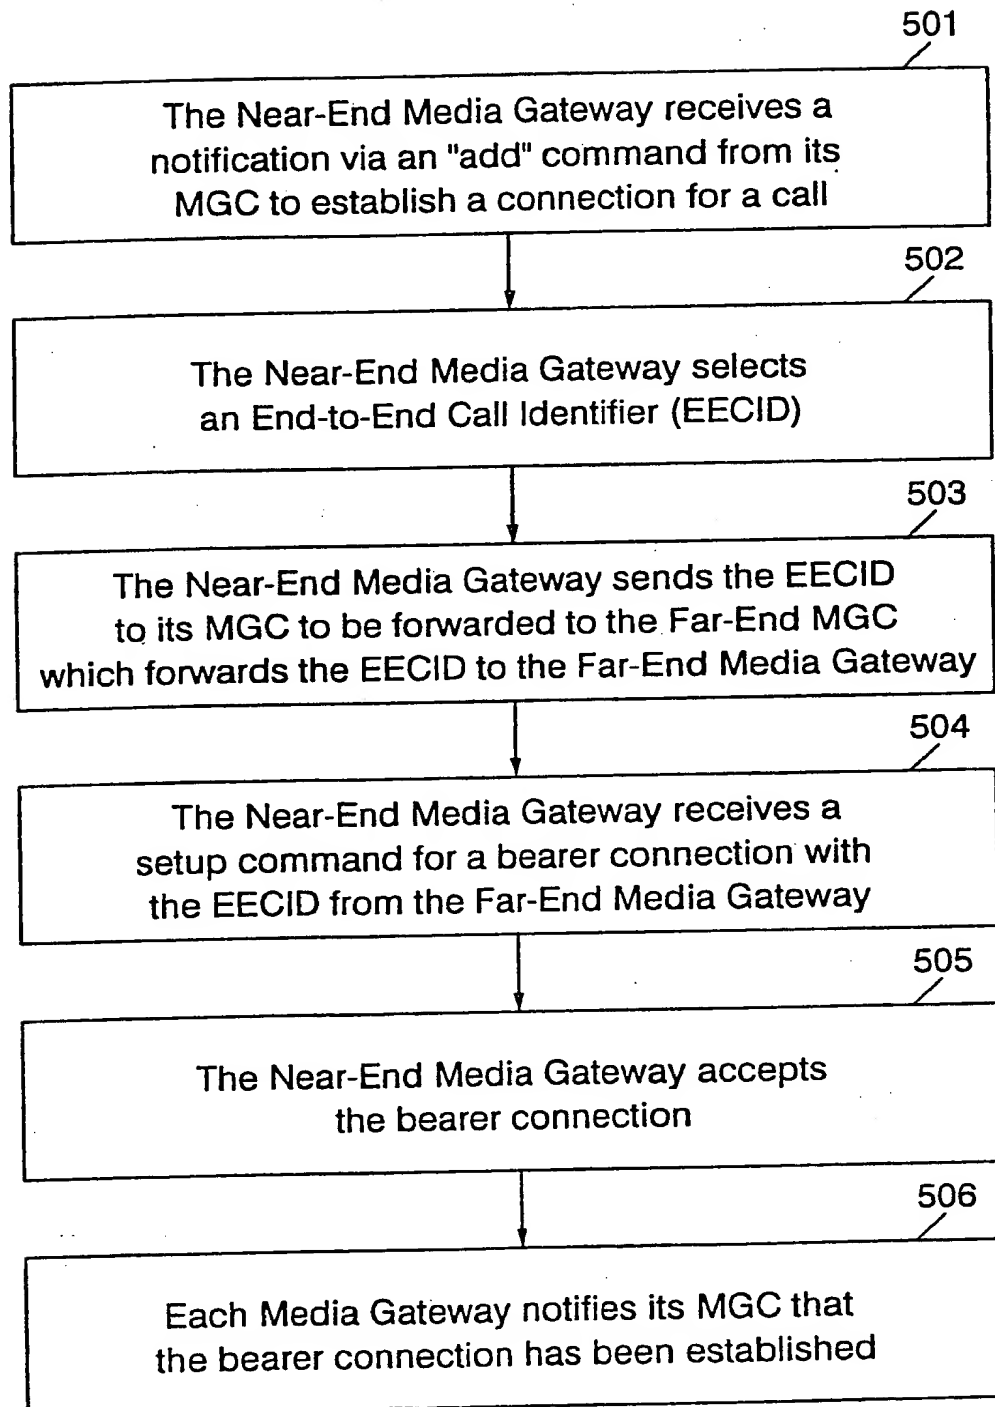


FIG. 6

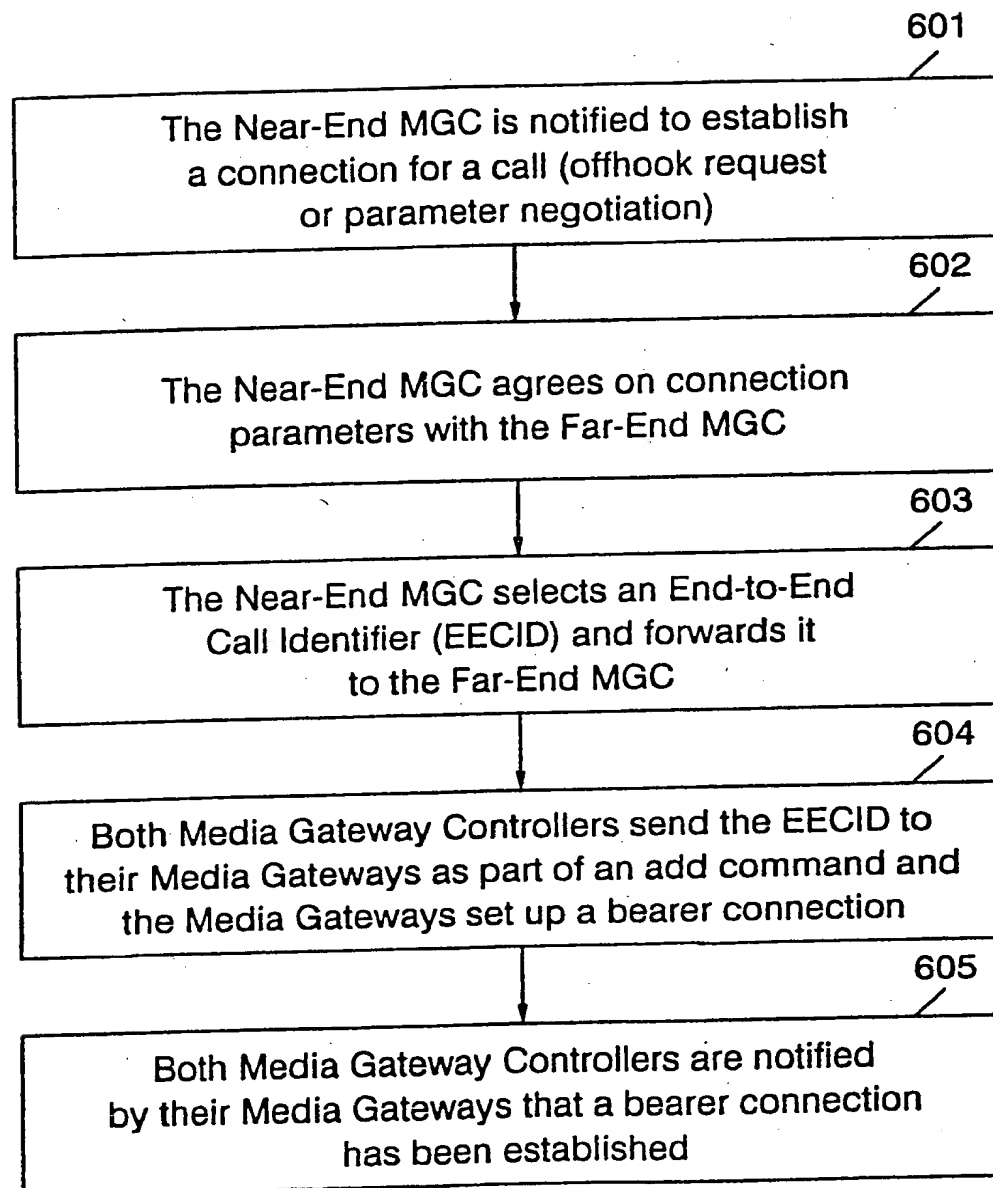


FIG. 7

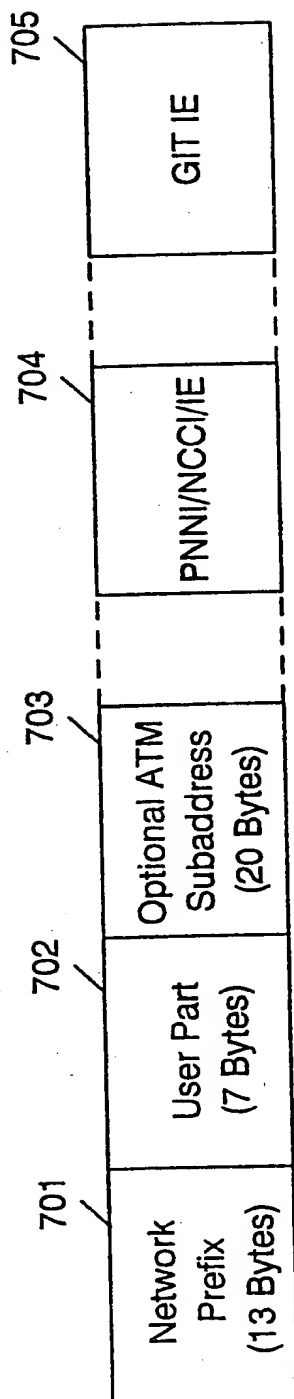


FIG. 8

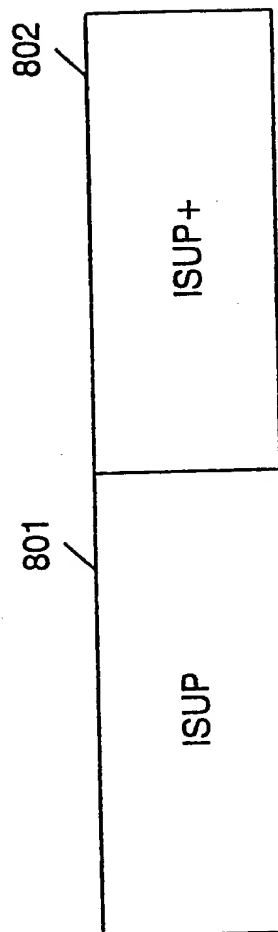


FIG. 9

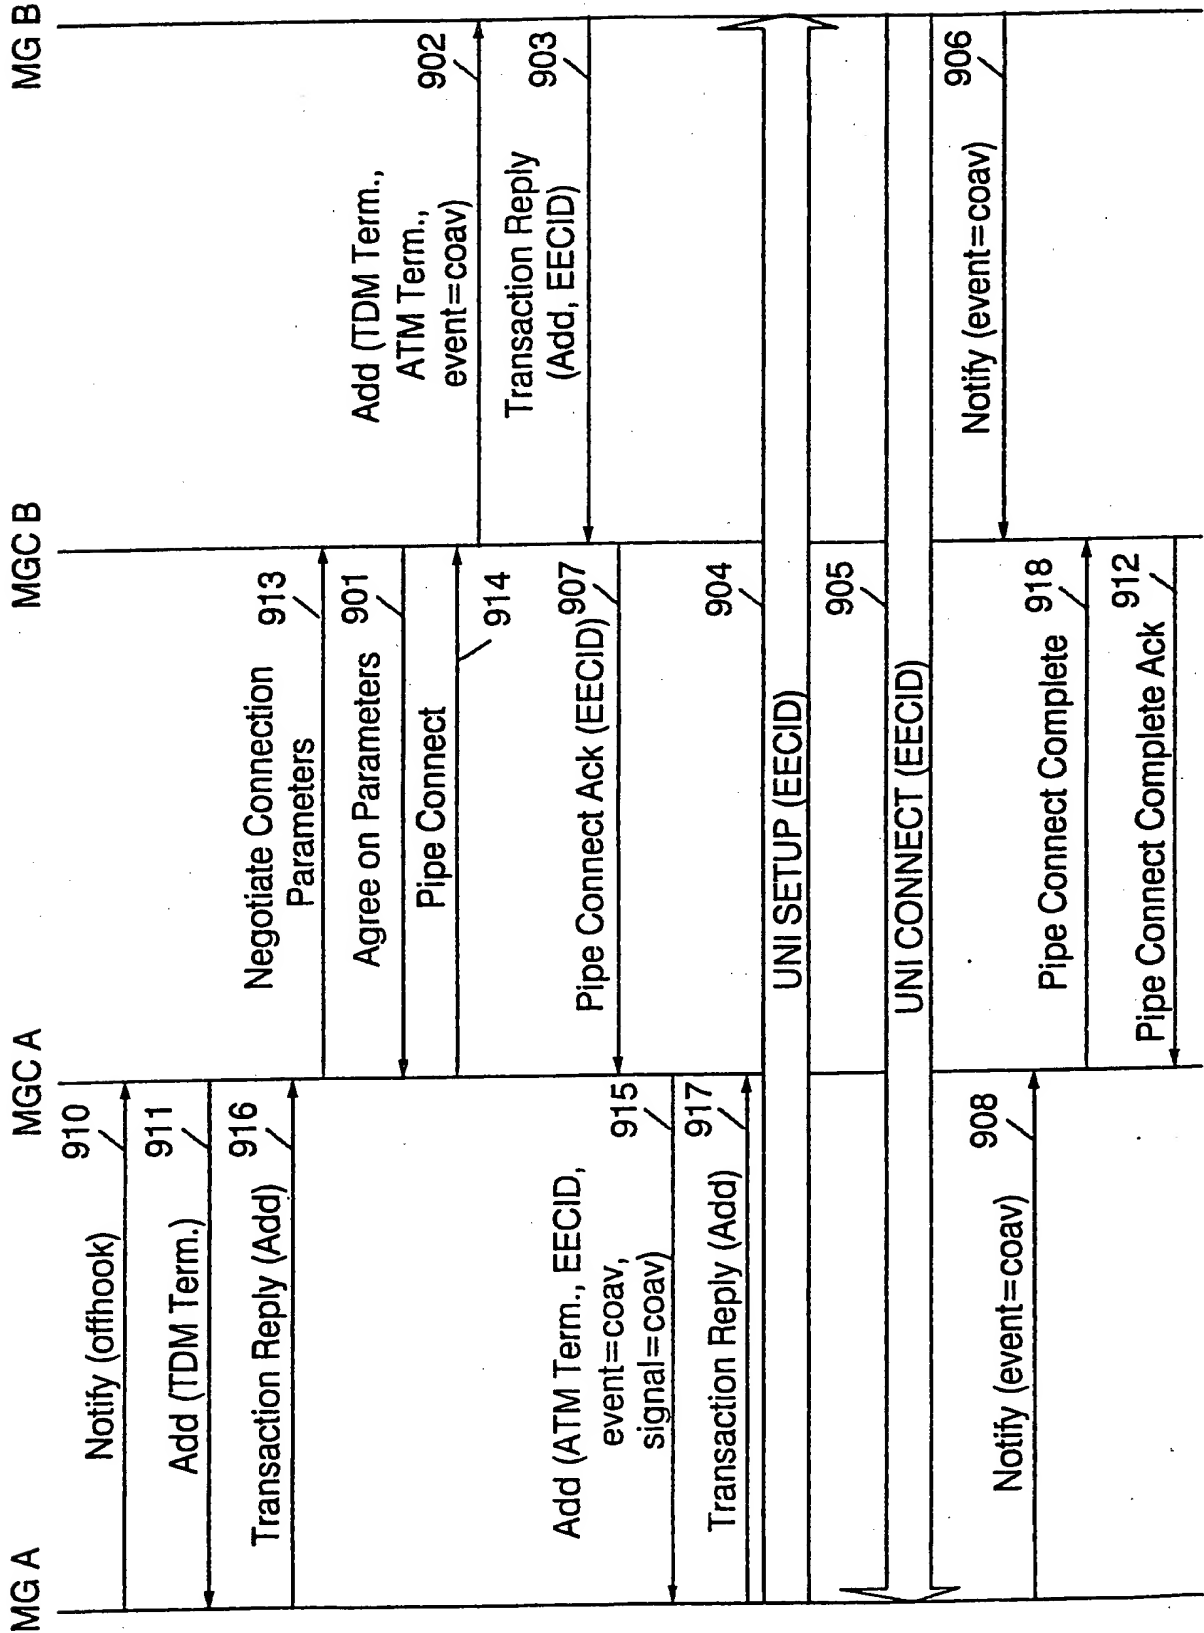


FIG. 10

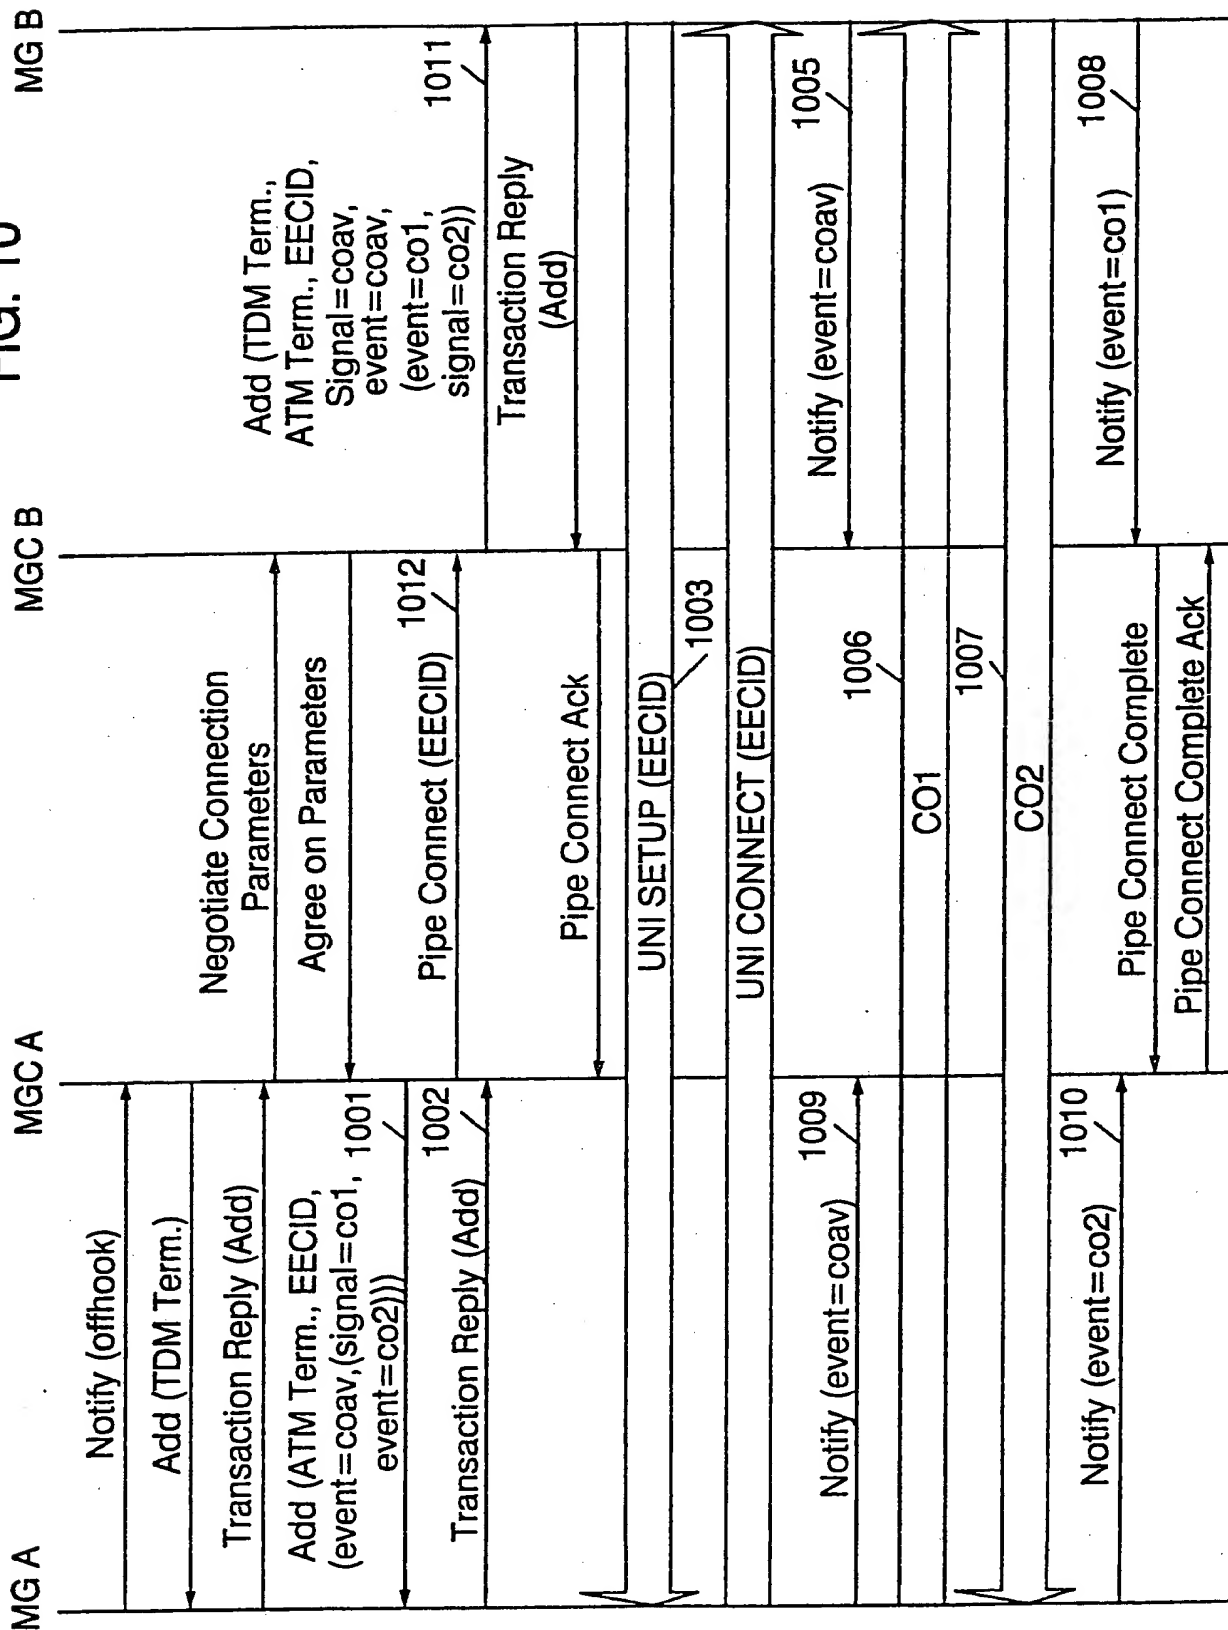


FIG. 11

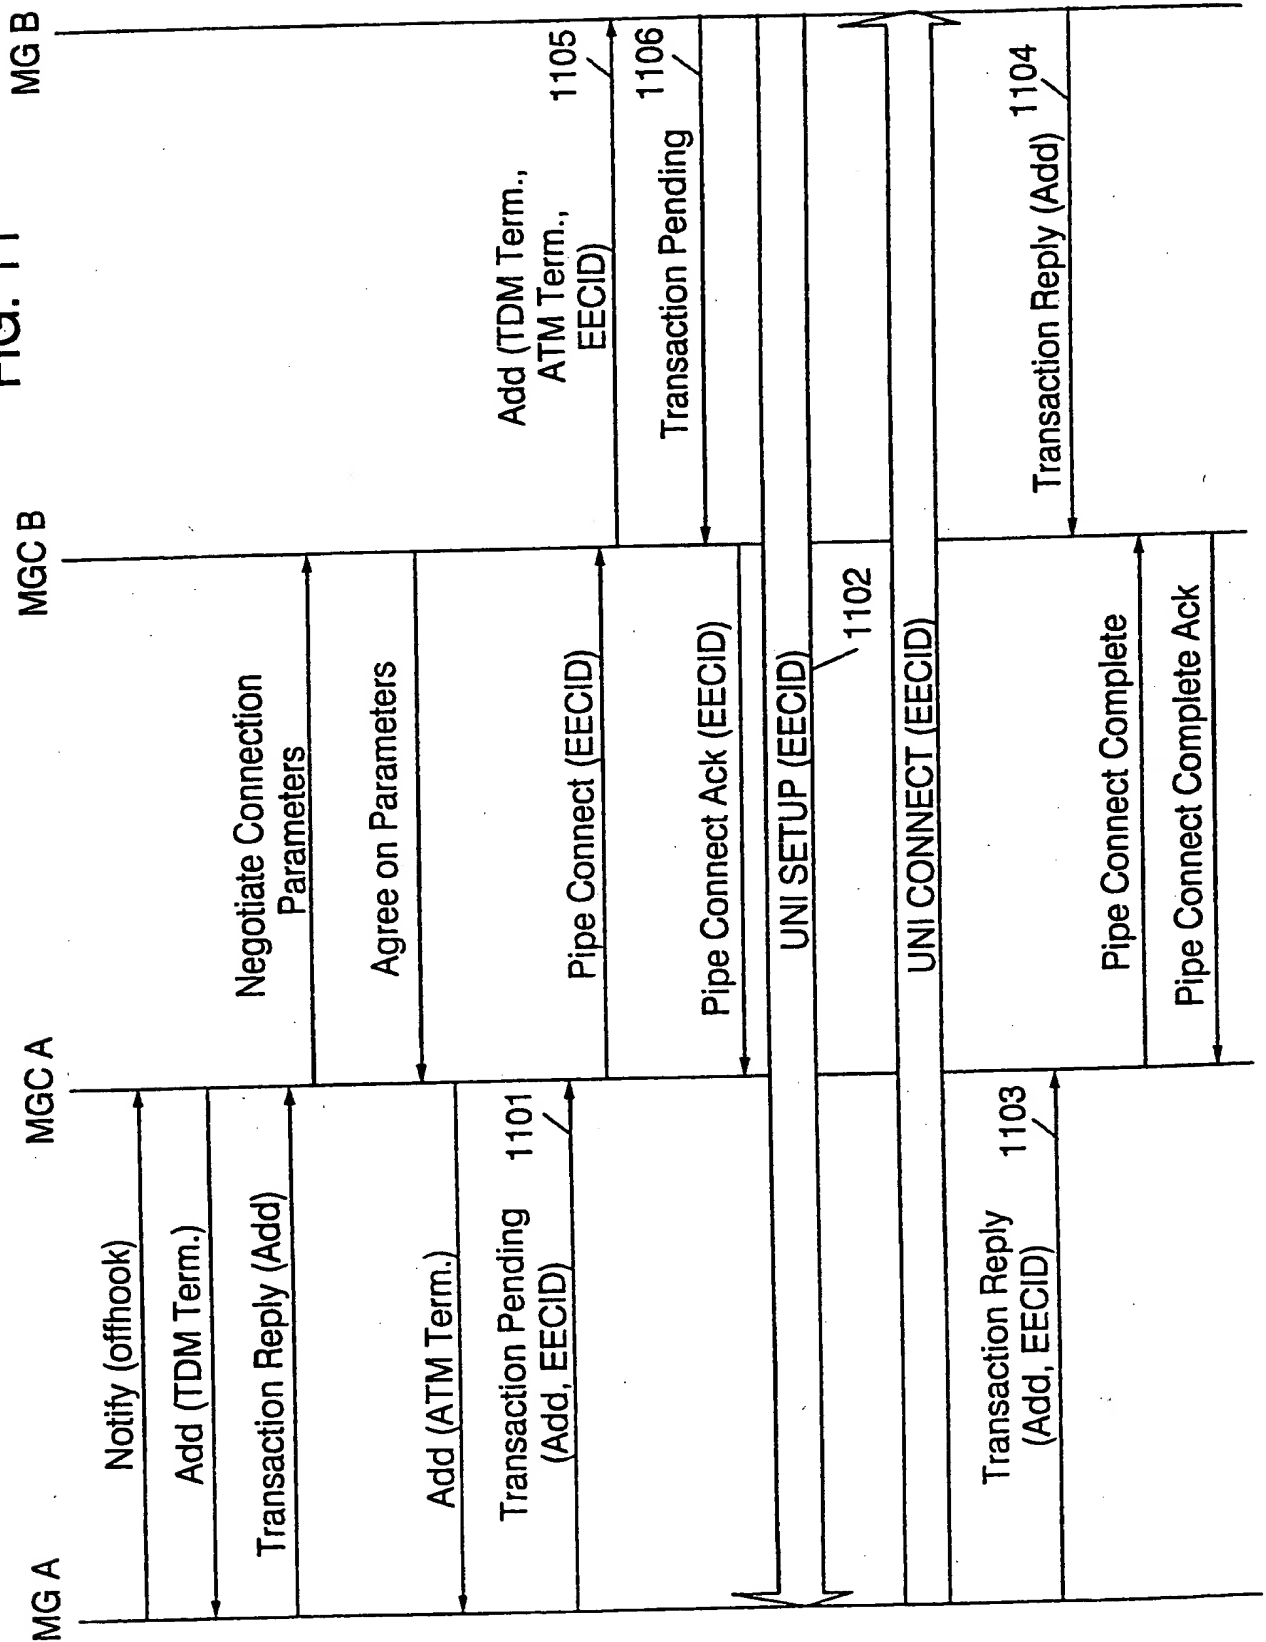
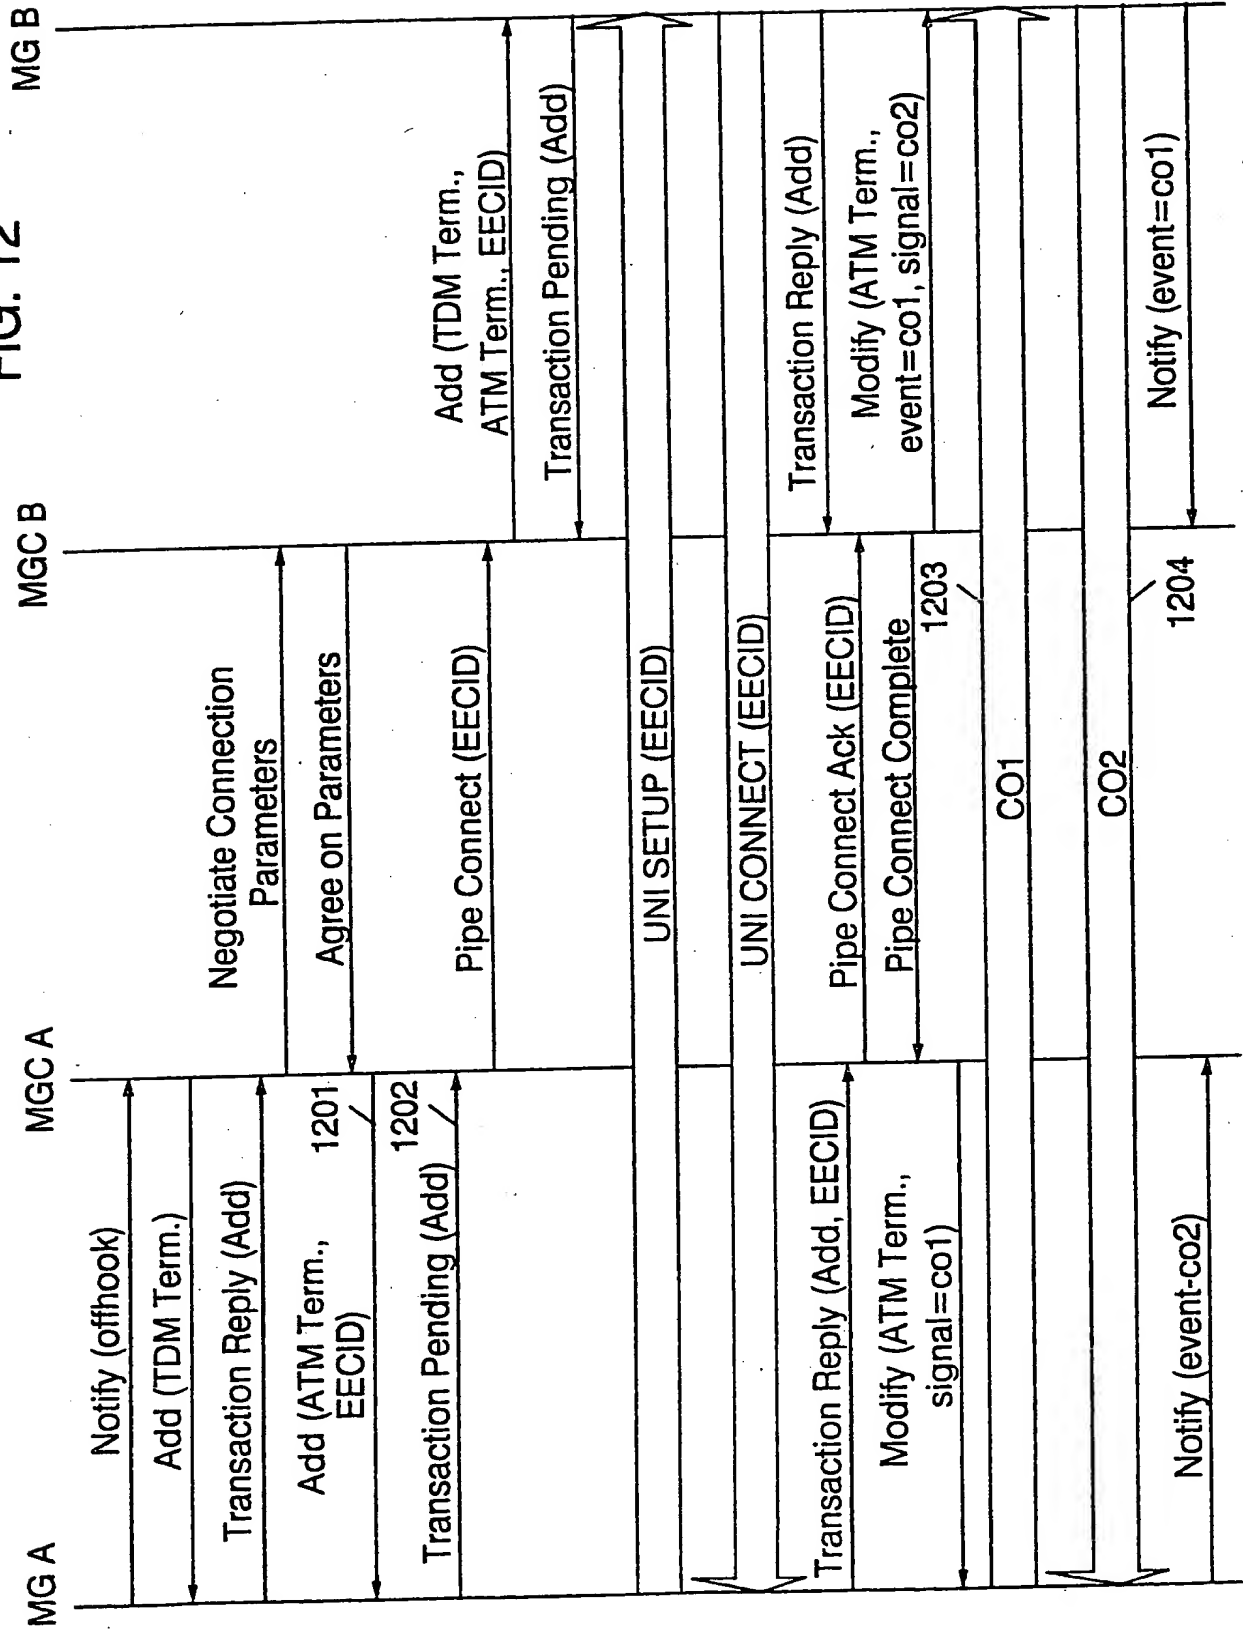


FIG. 12



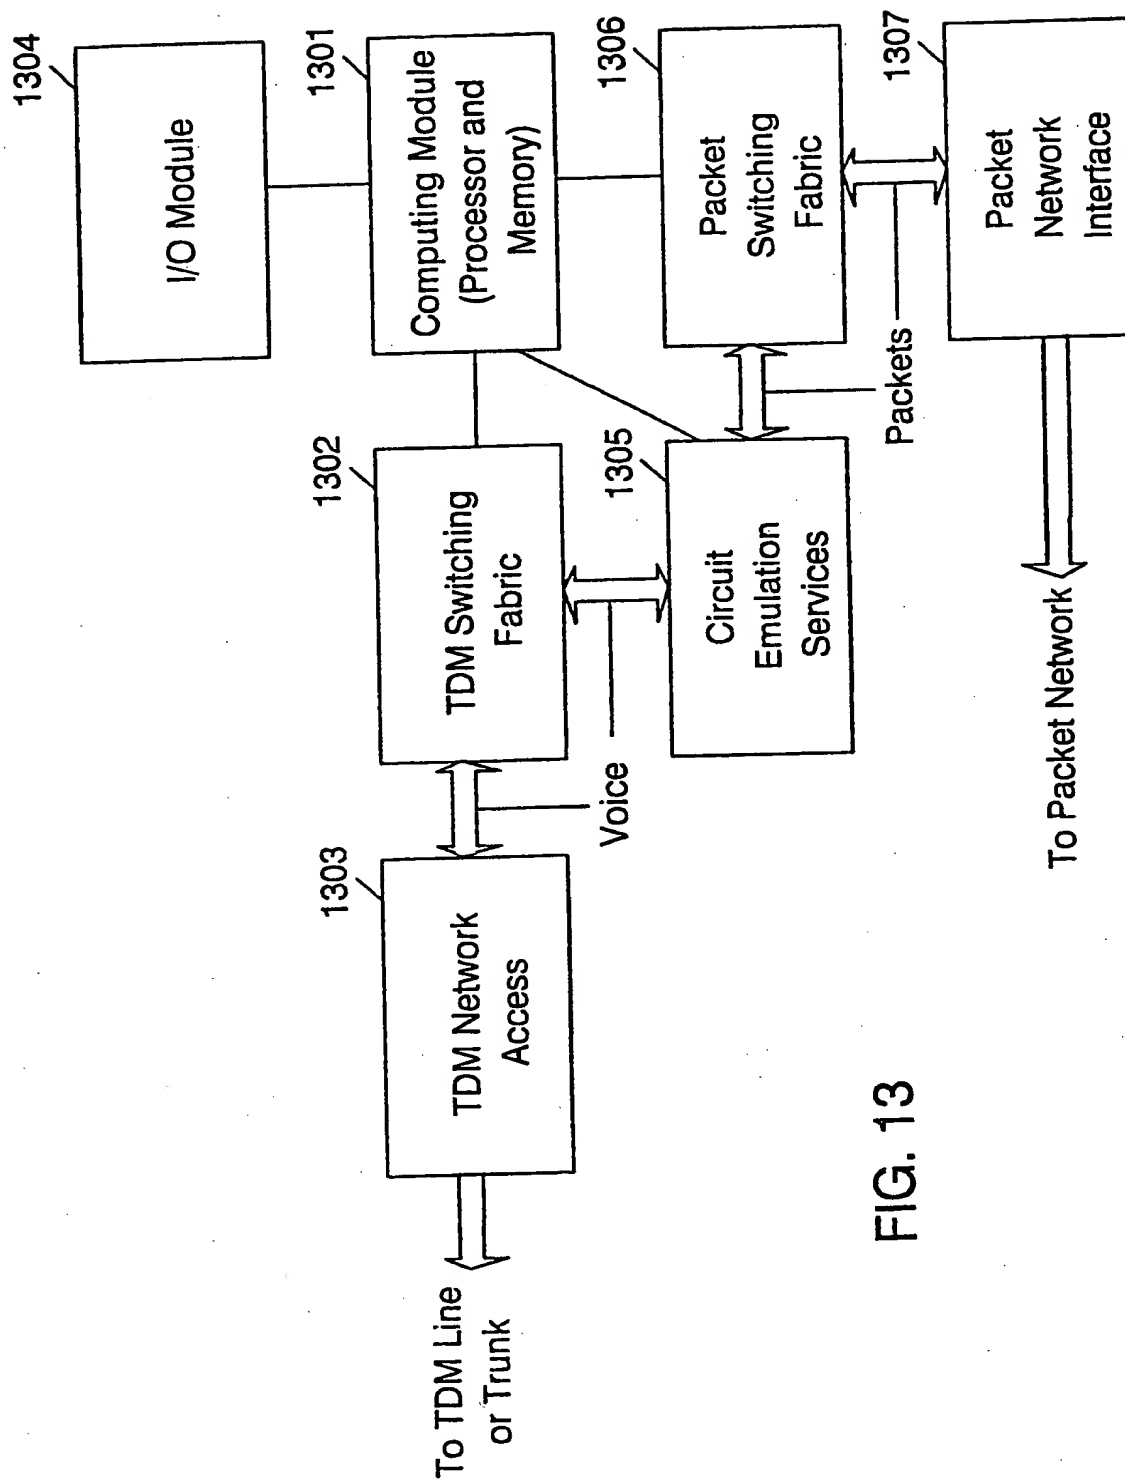


FIG. 13

FIG. 14

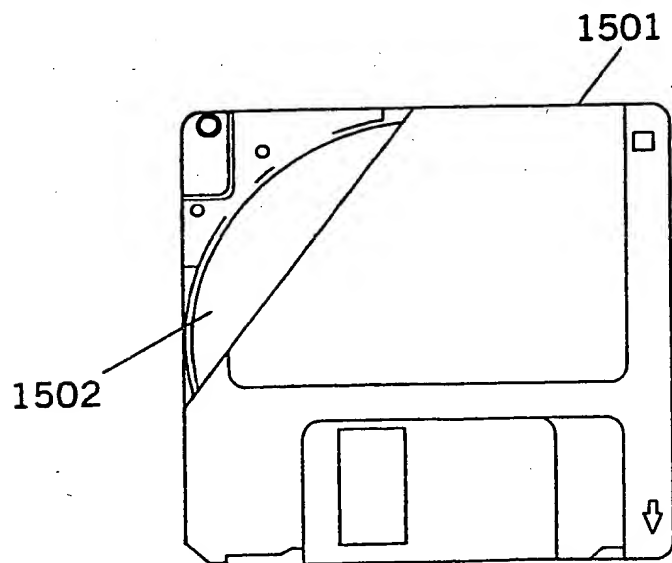
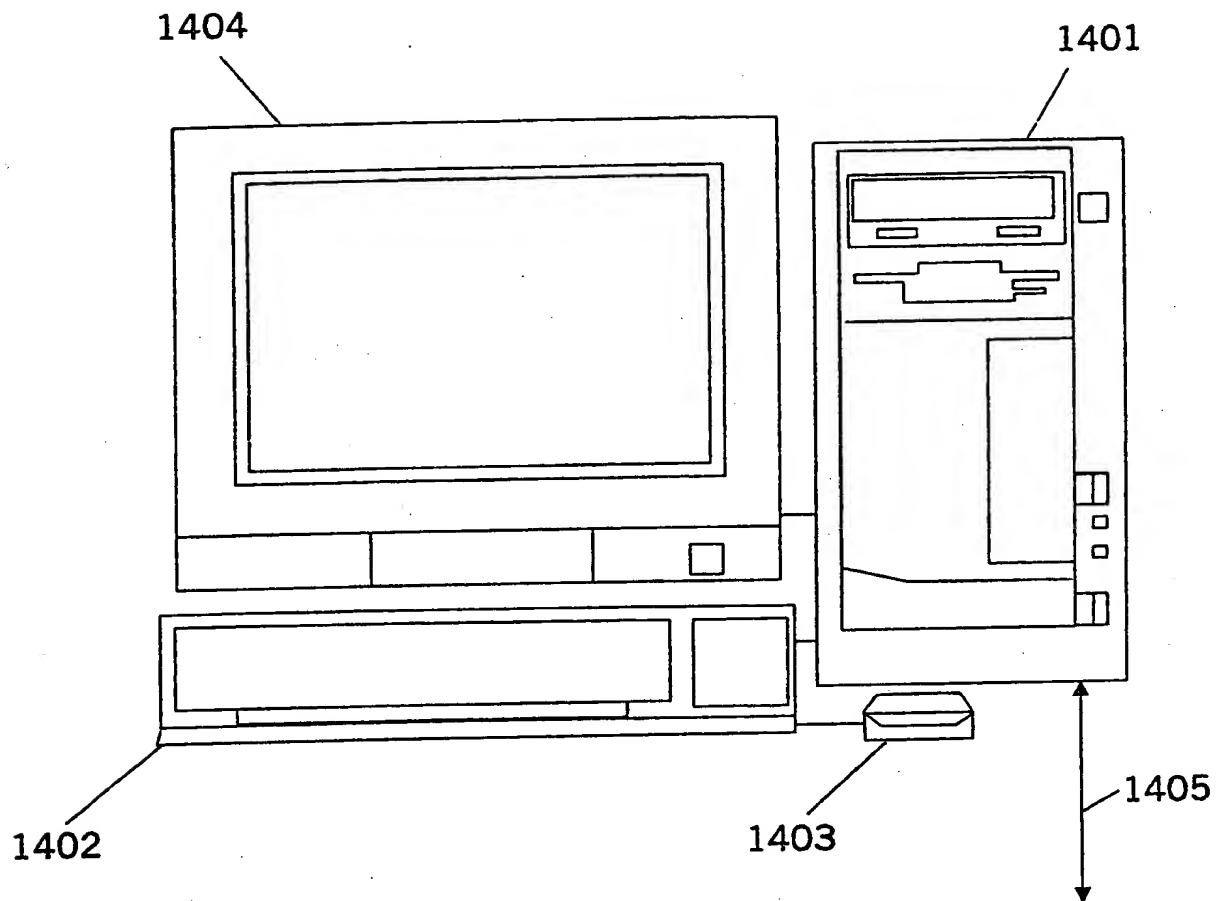


FIG. 15

FIG. 16


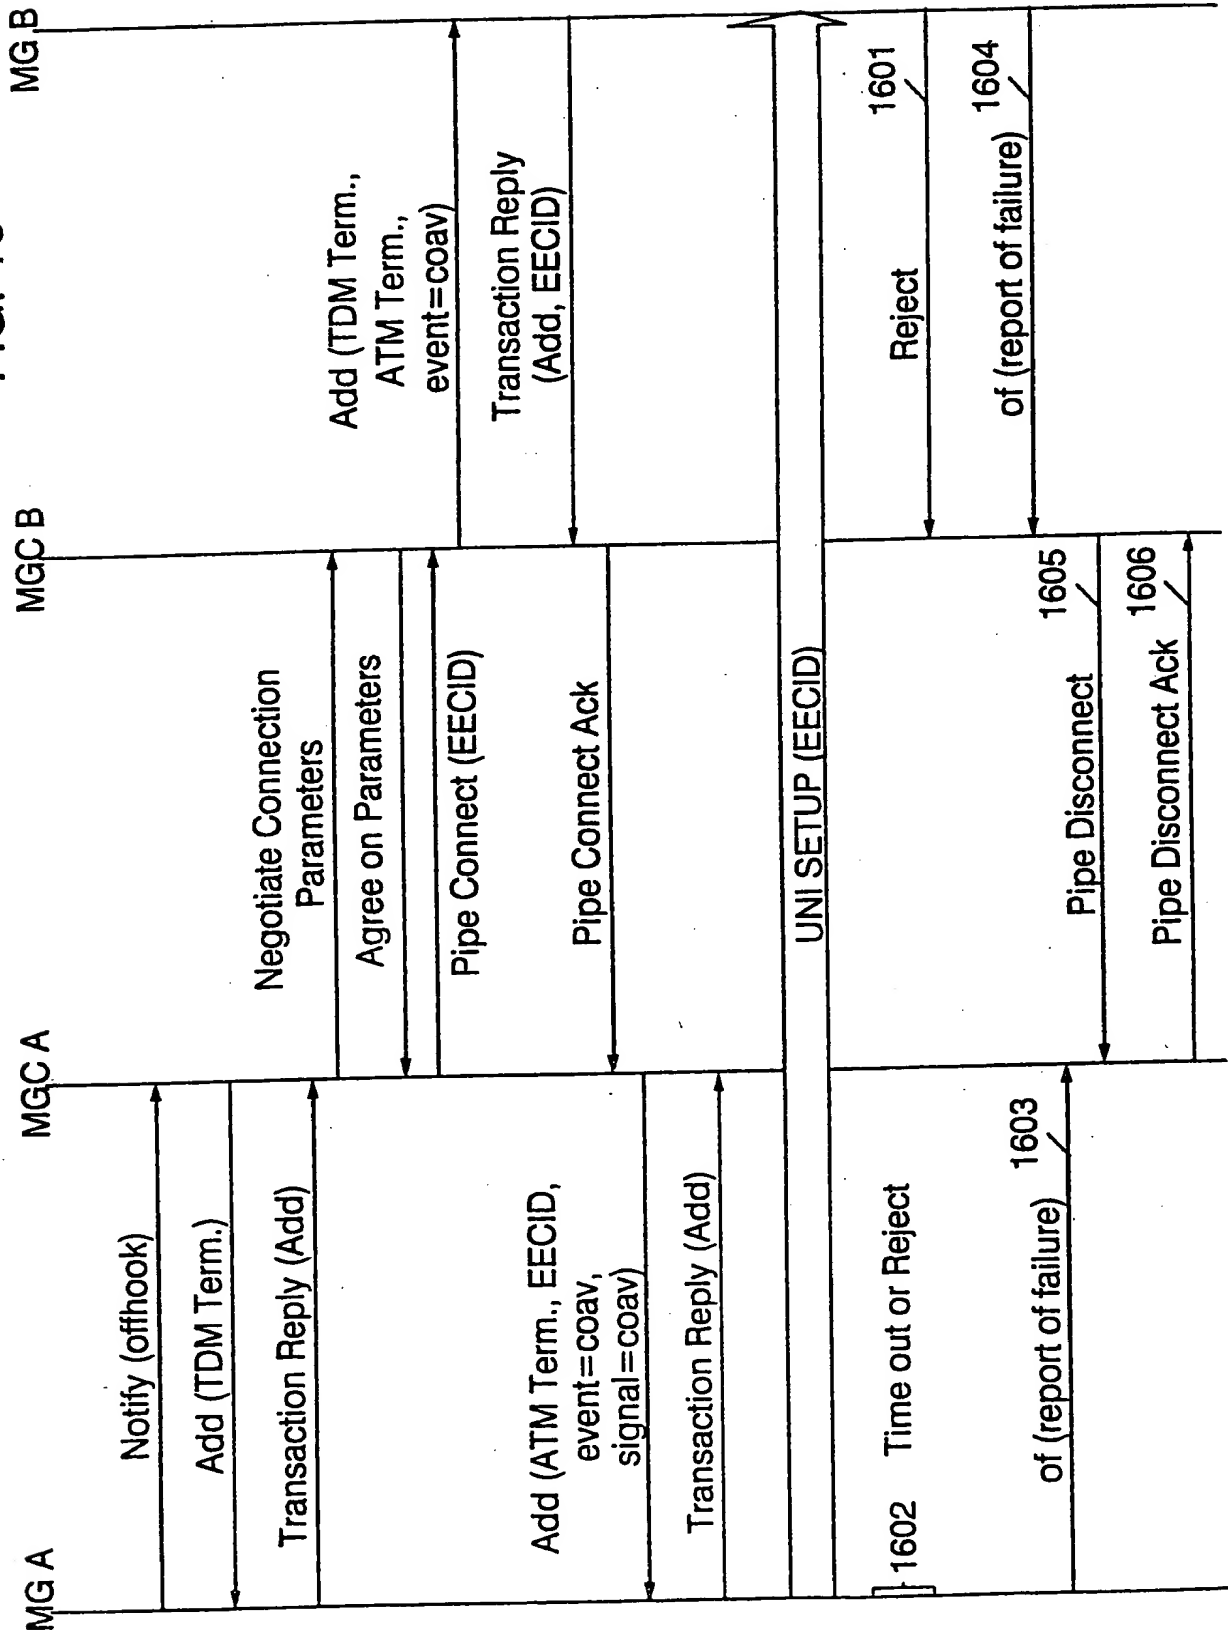


FIG. 17

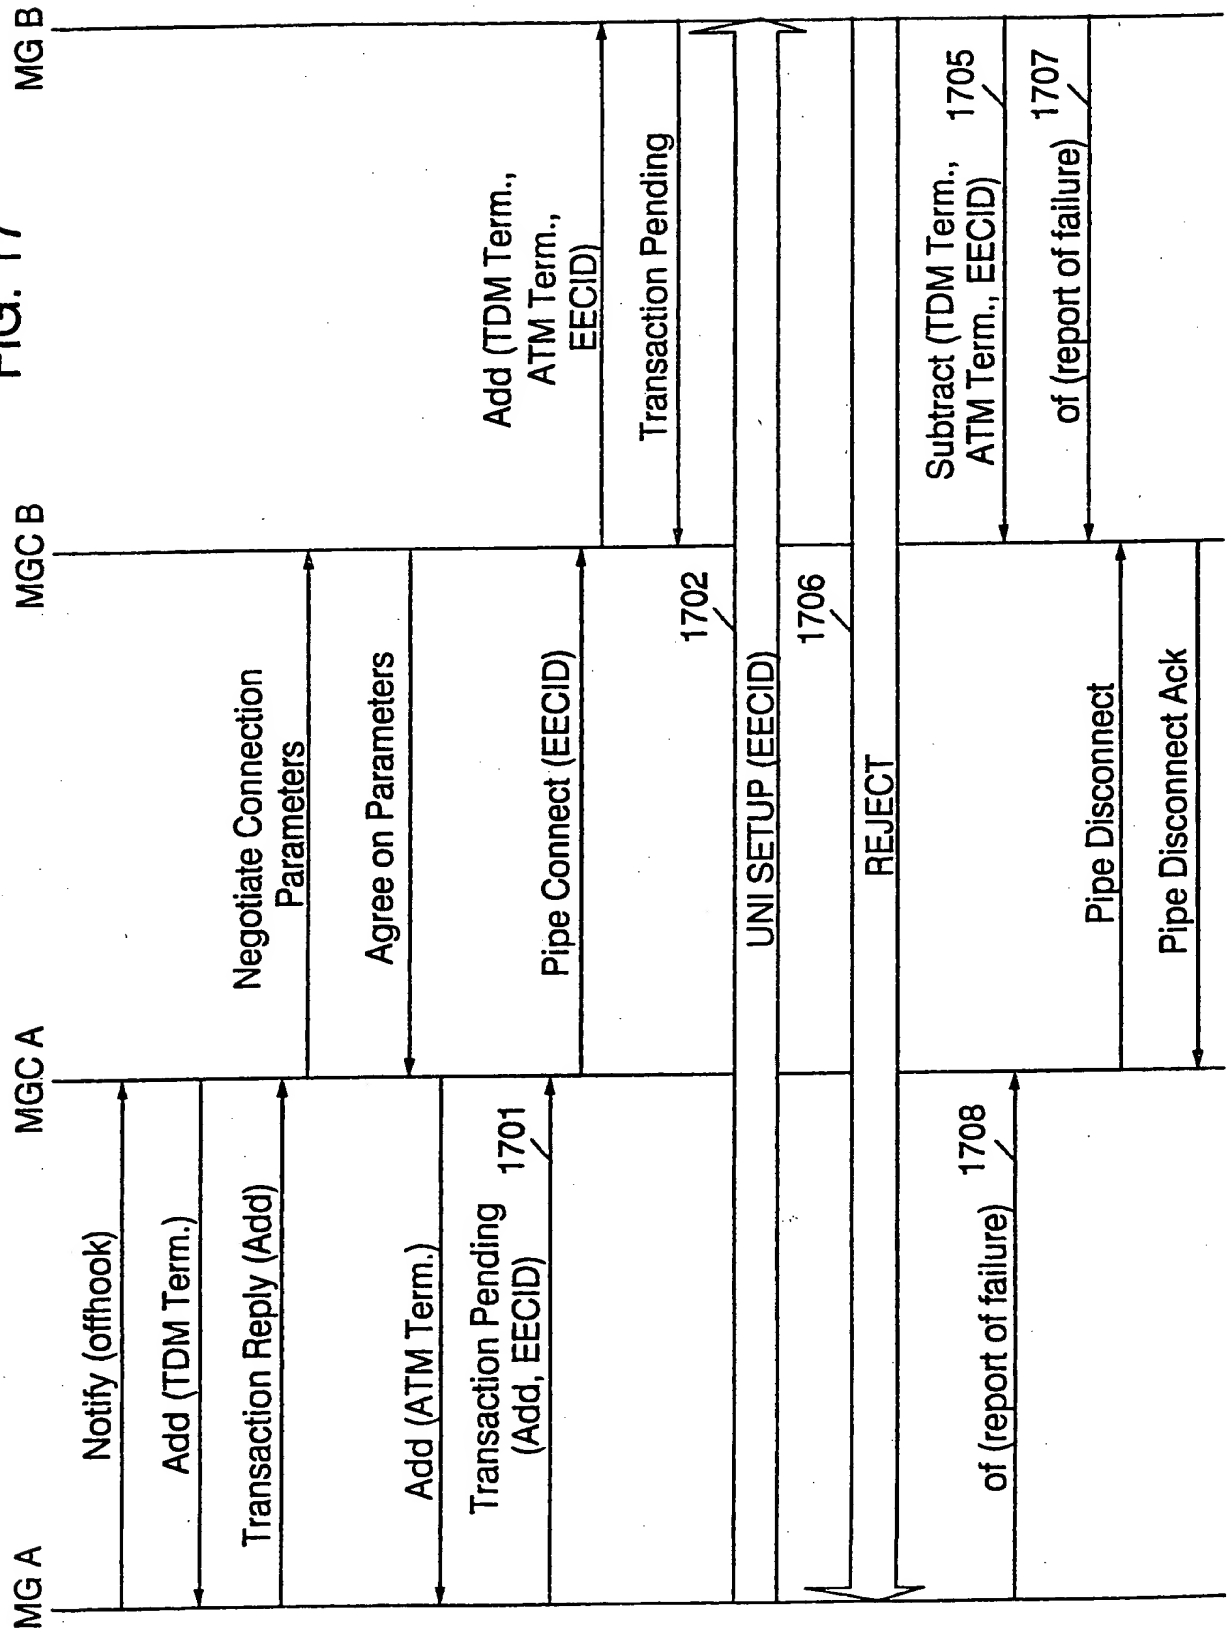

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/22855

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q11/04 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 682 325 A (GOODMAN WILLIAM ET AL) 28 October 1997 (1997-10-28) abstract column 4, line 31 - line 65 column 12, line 26 - line 39 ----	1,5,12, 16,19, 23,28-33
A	EP 0 658 063 A (AT & T CORP) 14 June 1995 (1995-06-14) column 2, line 12 - line 37 ----	1-33
A	EP 0 629 091 A (AT & T CORP) 14 December 1994 (1994-12-14) abstract ----- -/-	1-33

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

24 November 2000

Date of mailing of the international search report

07/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Staessen, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/22855

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BOESE J O ET AL: "THE MULTIMEDIA SCP" PROCEEDINGS OF THE GLOBAL TELECOMMUNICATIONS CONFERENCE AND EXHIBITION(GLOBECOM),US,NEW YORK, IEEE, vol. -, 15 November 1987 (1987-11-15), pages 1-5, XP002015212 paragraph "Multimedia SCP Functionality" -----</p>	1-33

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/22855

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5682325 A	28-10-1997	US 5740075 A	14-04-1998
		US 5621728 A	15-04-1997
		US 5748493 A	05-05-1998
		US 5917537 A	29-06-1999
EP 0658063 A	14-06-1995	US 5473679 A	05-12-1995
		AU 681715 B	04-09-1997
		AU 7918394 A	15-06-1995
		BR 9404748 A	08-08-1995
		CA 2118352 A	10-06-1995
		CN 1115141 A	17-01-1996
		CZ 9403038 A	14-06-1995
		HU 71562 A	28-12-1995
		JP 7203022 A	04-08-1995
		NZ 270053 A	27-07-1997
		PL 306175 A	12-06-1995
EP 0629091 A	14-12-1994	US 5392277 A	21-02-1995
		CA 2125423 A, C	12-12-1994
		CN 1122555 A	15-05-1996
		JP 7099549 A	11-04-1995

THIS PAGE BLANK (USPTO)